


Elongated Fittings

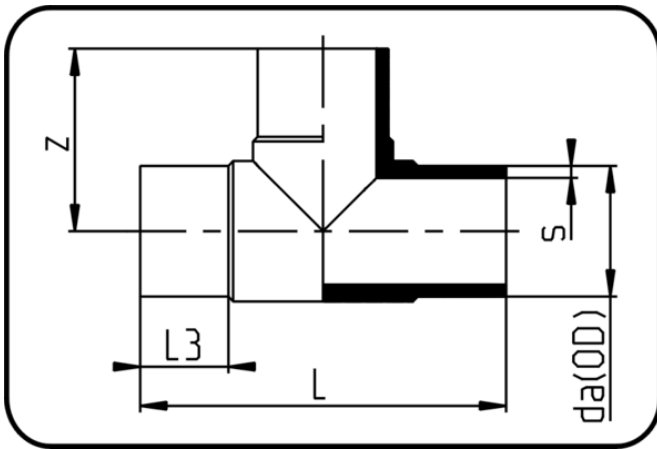

Code: 066

- Tee
- long spigot
- injection moulded
- Butt+E-socket-welding
- PE 100 black

| Dimension | Code | Detail | da(OD) mm | s mm | z mm | L mm | L3 mm | Weight |
|-----------|----------------|------------------------|--------------|---------|---------|---------|----------|--------|
| 63 | 25.066.0063.17 | 63X3,8 SDR17 ISO S-8 | 63 | 3,8 | 113 | 222 | 63 | 0.285 |
| 75 | 25.066.0075.17 | 75X4,5 SDR17 ISO S-8 | 75 | 4,5 | 131 | 258 | 70 | 0.478 |
| 90 | 25.066.0090.17 | 90X5,4 SDR17 ISO S-8 | 90 | 5,4 | 140 | 280 | 79 | 0.696 |
| 110 | 25.066.0110.17 | 110X6,6 SDR17 ISO S-8 | 110 | 6,6 | 156 | 313 | 84 | 1.154 |
| 125 | 25.066.0125.17 | 125X7,4 SDR17 ISO S-8 | 125 | 7,4 | 174 | 350 | 90 | 1.68 |
| 140 | 25.066.0140.17 | 140X8,3 SDR17 ISO S-8 | 140 | 8,3 | 190 | 380 | 95 | 2.12 |
| 160 | 25.066.0160.17 | 160X9,5 SDR17 ISO S-8 | 160 | 9,5 | 204,5 | 401 | 98 | 3 |
| 180 | 25.066.0180.17 | 180X10,7 SDR17 ISO S-8 | 180 | 10,7 | 260 | 521 | 134 | 5.22 |
| 200 | 25.066.0200.17 | 200X11,9 SDR17 ISO S-8 | 200 | 11,9 | 246 | 492 | 112 | 6 |
| 225 | 25.066.0225.17 | 225X13,4 SDR17 ISO S-8 | 225 | 13,4 | 270 | 540 | 120 | 8.12 |
| 250 | 25.066.0250.17 | 250X14,8 SDR17 ISO S-8 | 250 | 14,8 | 314 | 624 | 146 | 11.56 |
| 280 | 25.066.0280.17 | 280X16,6 SDR17 ISO S-8 | 280 | 16,6 | 347 | 694 | 158 | 15.5 |
| 315 | 25.066.0315.17 | 315X18,7 SDR17 ISO S-8 | 315 | 18,7 | 375 | 750 | 166 | 21.14 |
| 355 | 25.066.0355.17 | 355X21,1 SDR17 ISO S-8 | 355 | 21,1 | 440 | 880 | 188 | 32.3 |
| 400 | 25.066.0400.17 | 400X23,7 SDR17 ISO S-8 | 400 | 23,7 | 470 | 940 | 200 | 41.28 |
| 20 | 25.066.0020.11 | 20X3,0 SDR11 ISO S-5 | 20 | 3 | 54,5 | 107 | 34,5 | 0.029 |
| 25 | 25.066.0025.11 | 25X3,0 SDR11 ISO S-5 | 25 | 3 | 59 | 117 | 39 | 0.04 |
| 32 | 25.066.0032.11 | 32X3,0 SDR11 ISO S-5 | 32 | 3 | 71 | 144 | 44 | 0.067 |
| 40 | 25.066.0040.11 | 40X3,7 SDR11 ISO S-5 | 40 | 3,7 | 84 | 165 | 50 | 0.117 |
| 50 | 25.066.0050.11 | 50X4,6 SDR11 ISO S-5 | 50 | 4,6 | 95 | 189 | 56 | 0.199 |
| 63 | 25.066.0063.11 | 63X5,8 SDR11 ISO S-5 | 63 | 5,8 | 114 | 226 | 64 | 0.39 |
| 75 | 25.066.0075.11 | 75X6,8 SDR11 ISO S-5 | 75 | 6,8 | 128 | 260 | 70 | 0.639 |
| 90 | 25.066.0090.11 | 90X8,2 SDR11 ISO S-5 | 90 | 8,2 | 143 | 286 | 79 | 0.966 |

| Dimension | Code | Detail | da(OD) mm | s mm | z mm | L mm | L3 mm | Weight |
|-----------|----------------|---------------------------|--------------|---------|---------|---------|----------|--------|
| 110 | 25.066.0110.11 | 110X10,0 SDR11 ISO S-5 | 110 | 10 | 158 | 317 | 85 | 1.547 |
| 125 | 25.066.0125.11 | 125X11,4 SDR11 ISO S-5 | 125 | 11,4 | 177 | 356 | 91 | 2.24 |
| 140 | 25.066.0140.11 | 140X12,7 SDR11 ISO S-5 | 140 | 12,7 | 190 | 380 | 96,5 | 2.88 |
| 160 | 25.066.0160.11 | 160X14,6 SDR11 ISO S-5 | 160 | 14,6 | 202,5 | 405 | 99 | 4.1 |
| 180 | 25.066.0180.11 | 180X16,4 SDR11 ISO S-5 | 180 | 16,4 | 260 | 521 | 136 | 6.9 |
| 200 | 25.066.0200.11 | 200X18,2 SDR11 ISO S-5 | 200 | 18,2 | 245 | 490 | 112 | 7.92 |
| 225 | 25.066.0225.11 | 225X20,5 SDR11 ISO S-5 | 225 | 20,5 | 271 | 548 | 124 | 10.85 |
| 250 | 25.066.0250.11 | 250X22,7 SDR11 ISO S-5 | 250 | 22,7 | 310 | 622 | 147 | 15.06 |
| 280 | 25.066.0280.11 | 280X25,4 SDR11 ISO S-5 | 280 | 25,4 | 347 | 694 | 158 | 20.86 |
| 315 | 25.066.0315.11 | 315X28,6 SDR11 ISO S-5 | 315 | 28,6 | 375 | 752 | 168 | 28.46 |
| 355 | 25.066.0355.11 | 355X32,2 SDR11 ISO S-5 | 355 | 32,2 | 437 | 874 | 188 | 42.68 |
| 400 | 25.066.0400.11 | 400X36,3 SDR11 ISO S-5 | 400 | 36,3 | 470 | 940 | 198 | 56.46 |
| 63 | 25.066.0063.07 | 63X8,6 SDR7,4 ISO S-3,2 | 63 | 8,6 | 111 | 219 | 63 | 0.489 |
| 90 | 25.066.0090.07 | 90X12,3 SDR7,4 ISO S-3,2 | 90 | 12,3 | 141 | 284 | 79 | 1.276 |
| 110 | 25.066.0110.07 | 110X15,1 SDR7,4 ISO S-3,2 | 110 | 15,1 | 158 | 315 | 82 | 2.08 |
| 125 | 25.066.0125.07 | 125X17,1 SDR7,4 ISO S-3,2 | 125 | 17,1 | 171,5 | 342 | 89,5 | 2.873 |
| 160 | 25.066.0160.07 | 160X21,9 SDR7,4 ISO S-3,2 | 160 | 21,9 | 203 | 405 | 99 | 5.48 |
| 200 | 25.066.0200.07 | 200X27,4 SDR7,4 ISO S-3,2 | 200 | 27,4 | 247 | 495 | 115 | 11.1 |
| 225 | 25.066.0225.07 | 225X30,8 SDR7,4 ISO S-3,2 | 225 | 30,8 | 268,5 | 542 | 120 | 14.7 |