


## Elongated Fittings

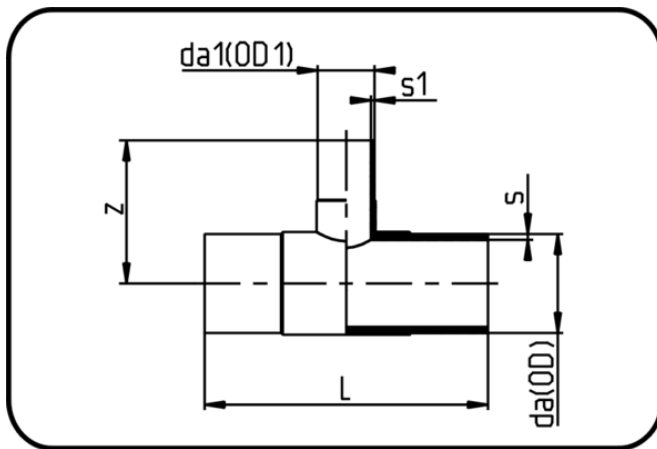

Code: 065

- Tee reduced
- long spigot
- injection moulded
- Butt+E-socket-welding
- PE 100 black

Dimension	Code	Detail	da(OD) mm	da1(OD 1) mm	s mm	z mm	L mm	s1 mm	Weight
63/50	25.065.6350.11	63/50 SDR11 ISO S-5	63	50	5,8	102,5	216	4,6	0.318
75/63	25.065.7563.11	75/63 SDR11 ISO S-5	75	63	6,8	117	252	5,8	0.552
90/63	25.065.9063.11	90/63 SDR11 ISO S-5	90	63	8,2	136	266	5,8	0.76
90/75	25.065.9075.11	90/75 SDR11 ISO S-5	90	75	8,2	138	272	6,8	0.821
110/63	25.065.1163.11	110/63 SDR11 ISO S-5	110	63	10	155	305	5,8	1.24
110/75	25.065.1175.11	110/75 SDR11 ISO S-5	110	75	10	149	305	6,8	1.22
110/90	25.065.1190.11	110/90 SDR11 ISO S-5	110	90	10	155	310	8,2	1.3
125/90	25.065.1290.11	125/90 SDR11 ISO S-5	125	90	11,4	168	332	8,2	1.7
125/110	25.065.1211.11	125/110 SDR11 ISO S-5	125	110	11,4	167	340	10	1.92
160/63	25.065.1663.11	160/63 SDR11 ISO S-5	160	63	14,6	172	340	5,8	2.62
160/75	25.065.1675.11	160/75 SDR11 ISO S-5	160	75	14,6	179	344	6,8	2.68
160/90	25.065.1690.11	160/90 SDR11 ISO S-5	160	90	14,6	177	343	8,2	2.7
160/110	25.065.1611.11	160/110 SDR11 ISO S-5	160	110	14,6	196	392	10	3.26
180/90	25.065.1890.11	180/90 SDR11 ISO S-5	180	90	16,4	200	420	8,2	4.42
180/110	25.065.1811.11	180/110 SDR11 ISO S-5	180	110	16,4	220	455	10	4.72
180/160	25.065.1816.11	180/160 SDR11 ISO S-5	180	160	16,4	204	412	14,6	4.7
200/63	25.065.2063.11	200/63 SDR11 ISO S-5	200	63	18,2	226	553	5,8	7.14
200/90	25.065.2090.11	200/90 SDR11 ISO S-5	200	90	18,2	229	550	8,2	7.16
200/110	25.065.2011.11	200/110 SDR11 ISO S-5	200	110	18,2	242	550	10	7.34
200/125	25.065.2012.11	200/125 SDR11 ISO S-5	200	125	18,2	245	550	11,4	7.34
200/160	25.065.2016.11	200/160 SDR11 ISO S-5	200	160	18,2	270	550	14,6	8.6
225/75	25.065.2275.11	225/75 SDR11 ISO S-5	225	75	20,5	226	440	6,8	6.82
225/90	25.065.2290.11	225/90 SDR11 ISO S-5	225	90	20,5	224	442	8,2	6.86

Dimension	Code	Detail	da(OD) mm	da1(OD 1) mm	s mm	z mm	L mm	s1 mm	Weight
225/110	25.065.2211.11	225/110 SDR11 ISO S-5	225	110	20,5	226	439	10	6.9
225/160	25.065.2216.11	225/160 SDR11 ISO S-5	225	160	20,5	246	486	14,6	8.46
225/180	25.065.2218.11	225/180 SDR11 ISO S-5	225	180	20,5	274	546	16,4	10.04
315/110	25.065.3111.11	315/110 SDR11 ISO S-5	315	110	28,6	290	546	10	15.9
315/160	25.065.3116.11	315/160 SDR11 ISO S-5	315	160	28,6	310	575	14,6	17.52
315/225	25.065.3122.11	315/225 SDR11 ISO S-5	315	225	28,6	335	638	20,5	20
315/250	25.065.3125.11	315/250 SDR11 ISO S-5	315	250	28,6	333	670	22,7	21.54