


Elongated Fittings

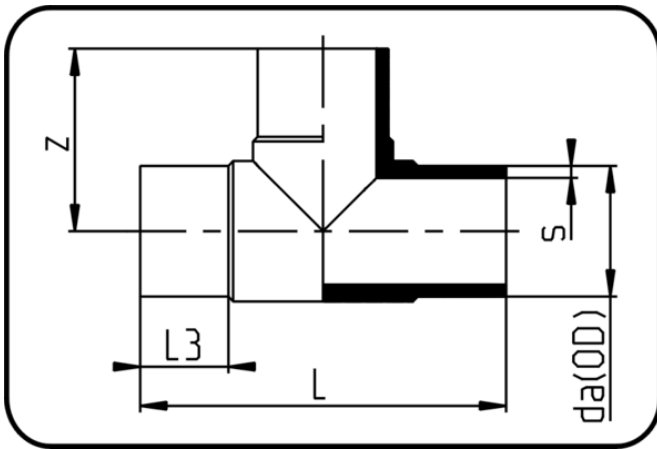

Code: 066

- Tee
- long spigot
- injection moulded
- Butt+E-socket-welding
- PPR grey

Dimension	Code	Detail	da(OD) mm	s mm	z mm	L mm	L3 mm	Weight
20	11.066.0020.11	20X1,9 SDR11 ISO S-5	20	1,9	57	109	37	0.02
25	11.066.0025.11	25X2,3 SDR11 ISO S-5	25	2,3	59	117	40	0.034
32	11.066.0032.11	32X2,9 SDR11 ISO S-5	32	2,9	72	144	45	0.065
40	11.066.0040.11	40X3,7 SDR11 ISO S-5	40	3,7	84	168	51	0.111
50	11.066.0050.11	50X4,6 SDR11 ISO S-5	50	4,6	97	192	58	0.188
63	11.066.0063.11	63X5,8 SDR11 ISO S-5	63	5,8	115	229	66	0.366
75	11.066.0075.11	75X6,8 SDR11 ISO S-5	75	6,8	131	264	71	0.613
90	11.066.0090.11	90X8,2 SDR11 ISO S-5	90	8,2	145	290	82	0.954
110	11.066.0110.11	110X10,0 SDR11 ISO S-5	110	10	160	320	86	1.5
125	11.066.0125.11	125X11,4 SDR11 ISO S-5	125	11,4	175	356	93,5	2.14
140	11.066.0140.11	140X12,7 SDR11 ISO S-5	140	12,7	190	380	98	2.76
160	11.066.0160.11	160X14,6 SDR11 ISO S-5	160	14,6	208	410	102,5	4
180	11.066.0180.11	180X16,4 SDR11 ISO S-5	180	16,4	264	528	138	6.66
200	11.066.0200.11	200X18,2 SDR11 ISO S-5	200	18,2	250	500	116	7.74
225	11.066.0225.11	225X20,5 SDR11 ISO S-5	225	20,5	275	552	125,5	10.6
250	11.066.0250.11	250X22,7 SDR11 ISO S-5	250	22,7	315	630	148	14.88
280	11.066.0280.11	280X25,4 SDR11 ISO S-5	280	25,4	352	704	161	20.32
315	11.066.0315.11	315X28,6 SDR11 ISO S-5	315	28,6	380	760	170	27.8