


## Elongated Fittings

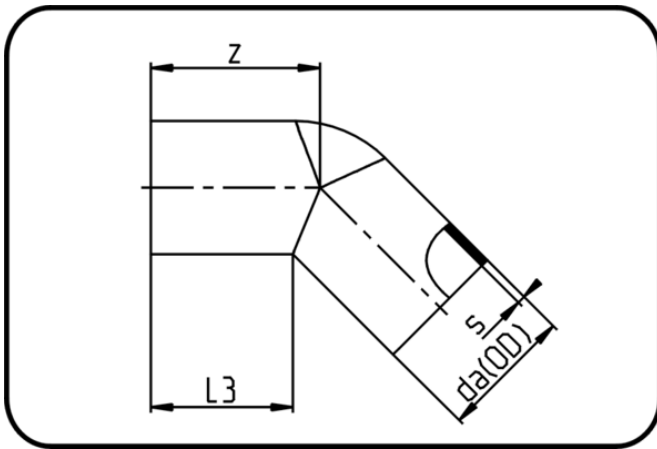

Code: 060

- Elbow 45°
- long spigot
- injection moulded
- Butt+E-socket-welding
- PPR grey

Dimension	Code	Detail	da(OD) mm	s mm	z mm	L3 mm	Weight
63	11.060.0063.17	63X3,8 SDR17 ISO S-8	63	3,8	80	66	0.11
75	11.060.0075.17	75X4,5 SDR17 ISO S-8	75	4,5	90	70	0.175
90	11.060.0090.17	90X5,4 SDR17 ISO S-8	90	5,4	101	79	0.291
110	11.060.0110.17	110X6,6 SDR17 ISO S-8	110	6,6	112	82	0.481
125	11.060.0125.17	125X7,4 SDR17 ISO S-8	125	7,4	130,5	99,5	0.67
140	11.060.0140.17	140X8,3 SDR17 ISO S-8	140	8,3	137	102	0.847
160	11.060.0160.17	160X9,5 SDR17 ISO S-8	160	9,5	156,5	116,5	1.28
180	11.060.0180.17	180X10,7 SDR17 ISO S-8	180	10,7	178,5	133,5	1.96
200	11.060.0200.17	200X11,9 SDR17 ISO S-8	200	11,9	166	122,5	2.2
225	11.060.0225.17	225X13,4 SDR17 ISO S-8	225	13,4	184	128	3.04
250	11.060.0250.17	250X14,8 SDR17 ISO S-8	250	14,8	217	160	4.76
280	11.060.0280.17	280X16,6 SDR17 ISO S-8	280	16,6	232	175	6.2
315	11.060.0315.17	315X18,7 SDR17 ISO S-8	315	18,7	251	180	8.32
20	11.060.0020.11	20X1,9 SDR11 ISO S-5	20	1,9	44	39	0.01
25	11.060.0025.11	25X2,3 SDR11 ISO S-5	25	2,3	48	42	0.016
32	11.060.0032.11	32X2,9 SDR11 ISO S-5	32	2,9	57	49	0.033
40	11.060.0040.11	40X3,7 SDR11 ISO S-5	40	3,7	63	53	0.051
50	11.060.0050.11	50X4,6 SDR11 ISO S-5	50	4,6	70	57	0.091
63	11.060.0063.11	63X5,8 SDR11 ISO S-5	63	5,8	80	67	0.165
75	11.060.0075.11	75X6,8 SDR11 ISO S-5	75	6,8	90	72,5	0.259
90	11.060.0090.11	90X8,2 SDR11 ISO S-5	90	8,2	104	82	0.423
110	11.060.0110.11	110X10,0 SDR11 ISO S-5	110	10	114	85	0.668
125	11.060.0125.11	125X11,4 SDR11 ISO S-5	125	11,4	132,5	99,5	1.015

Dimension	Code	Detail	da(OD) mm	s mm	z mm	L3 mm	Weight
140	11.060.0140.11	140X12,7 SDR11 ISO S-5	140	12,7	136	100	1.34
160	11.060.0160.11	160X14,6 SDR11 ISO S-5	160	14,6	156,5	116,5	1.96
180	11.060.0180.11	180X16,4 SDR11 ISO S-5	180	16,4	176,5	131,5	2.78
200	11.060.0200.11	200X18,2 SDR11 ISO S-5	200	18,2	170,5	120,5	3.44
225	11.060.0225.11	225X20,5 SDR11 ISO S-5	225	20,5	182,5	128	4.66
250	11.060.0250.11	250X22,7 SDR11 ISO S-5	250	22,7	217	160	6.76
280	11.060.0280.11	280X25,4 SDR11 ISO S-5	280	25,4	243	173	8.94
315	11.060.0315.11	315X28,6 SDR11 ISO S-5	315	28,6	256	179	12.26