


Fittings with short Spigot

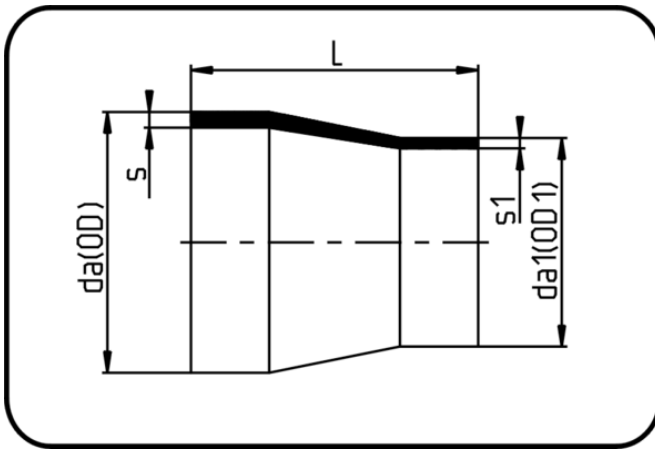

Code: 009

- Reducer concentric
- short spigot
- injection moulded
- Butt-welding
- PE 100 black

Dimension	Code	Detail	da(OD) mm	da1(OD1) mm	s mm	L mm	s1 mm	Weight
75/63	25.009.7563.11	75/63 SDR11 ISO S-5	75	63	6,8	59	5,8	0.077
90/63	25.009.9063.11	90/63 SDR11 ISO S-5	90	63	8,2	68	5,8	0.113
90/75	25.009.9075.11	90/75 SDR11 ISO S-5	90	75	8,2	68	6,8	0.125
110/50	25.009.1150.11	110/50 SDR11 ISO S-5	110	50	10	90	4,6	0.202
110/63	25.009.1163.11	110/63 SDR11 ISO S-5	110	63	10	84	5,8	0.2
110/75	25.009.1175.11	110/75 SDR11 ISO S-5	110	75	10	85	6,8	0.207
110/90	25.009.1190.11	110/90 SDR11 ISO S-5	110	90	10	85	8,2	0.22
125/63	25.009.1263.11	125/63 SDR11 ISO S-5	125	63	11,4	100	5,8	0.293
125/75	25.009.1275.11	125/75 SDR11 ISO S-5	125	75	11,4	100	6,8	0.369
125/90	25.009.1290.11	125/90 SDR11 ISO S-5	125	90	11,4	89	8,2	0.304
125/110	25.009.1211.11	125/110 SDR11 ISO S-5	125	110	11,4	89	10	0.329
140/75	25.009.1475.11	140/75 SDR11 ISO S-5	140	75	12,7	110	6,8	0.459
140/90	25.009.1490.11	140/90 SDR11 ISO S-5	140	90	12,7	110	8,2	0.493
140/110	25.009.1411.11	140/110 SDR11 ISO S-5	140	110	12,7	100	10	0.472
140/125	25.009.1412.11	140/125 SDR11 ISO S-5	140	125	12,7	92	11,4	0.445
160/90	25.009.1690.11	160/90 SDR11 ISO S-5	160	90	14,6	108	8,2	0.552
160/110	25.009.1611.11	160/110 SDR11 ISO S-5	160	110	14,6	108	10	0.639
160/125	25.009.1612.11	160/125 SDR11 ISO S-5	160	125	14,6	114	11,4	0.686
160/140	25.009.1614.11	160/140 SDR11 ISO S-5	160	140	14,6	114	12,7	0.66
180/90	25.009.1890.11	180/90 SDR11 ISO S-5	180	90	16,4	157	8,2	1.054
180/110	25.009.1811.11	180/110 SDR11 ISO S-5	180	110	16,4	157	10	1.12
180/125	25.009.1812.11	180/125 SDR11 ISO S-5	180	125	16,4	120	11,4	0.82
180/140	25.009.1814.11	180/140 SDR11 ISO S-5	180	140	16,4	136	12,7	1.03

Dimension	Code	Detail	da(OD) mm	da1(OD1) mm	s mm	L mm	s1 mm	Weight
180/160	25.009.1816.11	180/160 SDR11 ISO S-5	180	160	16,4	123	14,6	0.96
200/140	25.009.2014.11	200/140 SDR11 ISO S-5	200	140	18,2	137	12,7	1.174
200/160	25.009.2016.11	200/160 SDR11 ISO S-5	200	160	18,2	134	14,6	1.24
200/180	25.009.2018.11	200/180 SDR11 ISO S-5	200	180	18,2	137	16,4	1.361
225/140	25.009.2214.11	225/140 SDR11 ISO S-5	225	140	20,5	162	12,8	1.72
225/160	25.009.2216.11	225/160 SDR11 ISO S-5	225	160	20,5	137	14,6	1.59
225/180	25.009.2218.11	225/180 SDR11 ISO S-5	225	180	20,5	162	16,4	2.04
225/200	25.009.2220.11	225/200 SDR11 ISO S-5	225	200	20,5	162	18,2	2.1
250/160	25.009.2516.11	250/160 SDR11 ISO S-5	250	160	22,7	160	14,6	2
250/180	25.009.2518.11	250/180 SDR11 ISO S-5	250	180	22,7	177	16,4	2.605
250/200	25.009.2521.11	250/200 SDR11 ISO S-5	250	200	22,7	144	18,2	2.12
250/225	25.009.2522.11	250/225 SDR11 ISO S-5	250	225	22,7	144	20,5	2.26
280/200	25.009.2820.11	280/200 SDR11 ISO S-5	280	200	25,4	202	18,2	3.74
280/225	25.009.2822.11	280/225 SDR11 ISO S-5	280	225	25,4	202	20,5	3.66
280/250	25.009.2825.11	280/250 SDR11 ISO S-5	280	250	25,4	165	22,7	3.2
315/200	25.009.3120.11	315/200 SDR11 ISO S-5	315	200	28,6	193	18,2	4.2
315/225	25.009.3122.11	315/225 SDR11 ISO S-5	315	225	28,6	209	20,5	4.56
315/250	25.009.3125.11	315/250 SDR11 ISO S-5	315	250	28,6	185	22,7	4.34
315/280	25.009.3128.11	315/280 SDR11 ISO S-5	315	280	28,6	227	25,4	5.66