


## Fittings for Socket Welding

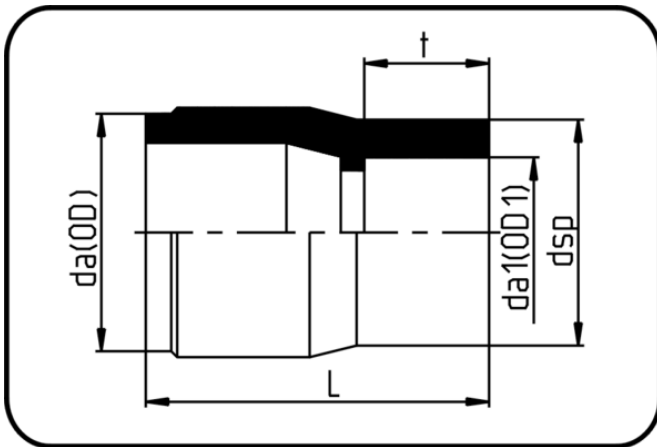

Code: 057

- Reducer concentric
- injection moulded
- Socket-welding
- PVDF natural

Dimension	Code	Detail	da(OD) mm	da1(OD 1) mm	L mm	dsp mm	t mm	p bar	Weight
25/16	30.057.2516.07	25/16 - MOP 20 bar	25	16	40	24	15	20	0.02
25/20	30.057.2520.07	25/20 - MOP 20 bar	25	20	40	29	15,7	20	0.022
32/20	30.057.3220.07	32/20 - MOP 20 bar	32	20	44	29	16,5	20	0.03
32/25	30.057.3225.07	32/25 - MOP 20 bar	32	25	44	35	17,6	20	0.035
40/20	30.057.4020.07	40/20 - MOP 20 bar	40	20	49	29	16,3	20	0.043
40/25	30.057.4025.07	40/25 - MOP 20 bar	40	25	49,5	35	17,6	20	0.046
40/32	30.057.4032.07	40/32 - MOP 20 bar	40	32	49	43	20,2	20	0.053
50/20	30.057.5020.07	50/20 - MOP 20 bar	50	20	55	29	16,2	20	0.064
50/25	30.057.5025.07	50/25 - MOP 20 bar	50	25	55	35	18	20	0.068
50/32	30.057.5032.07	50/32 - MOP 20 bar	50	32	55	43	20	20	0.075
50/40	30.057.5040.07	50/40 - MOP 20 bar	50	40	55	53	25	20	0.085
63/25	30.057.6325.07	63/25 - MOP 20 bar	63	25	64	35	18,4	20	0.107
63/32	30.057.6332.07	63/32 - MOP 20 bar	63	32	64,5	43	20,3	20	0.115
63/40	30.057.6340.07	63/40 - MOP 20 bar	63	40	64	52	21,4	20	0.126
63/50	30.057.6350.07	63/50 - MOP 20 bar	63	50	64	64,5	24,6	20	0.148
75/63	30.057.7563.07	75/63 - MOP 20 bar	75	63	64	81	28,6	20	0.209
90/63	30.057.9063.07	90/63 - MOP 20 bar	90	63	87	81	29	20	0.347
90/75	30.057.9075.07	90/75 - MOP 20 bar	90	75	87	92	33	20	0.359
110/63	30.057.1163.07	110/63 - MOP 20 bar	110	63	89	81	29,3	20	0.484
110/90	30.057.1190.07	110/90 - MOP 20 bar	110	90	87	113	35,5	20	0.575