


Elongated Fittings

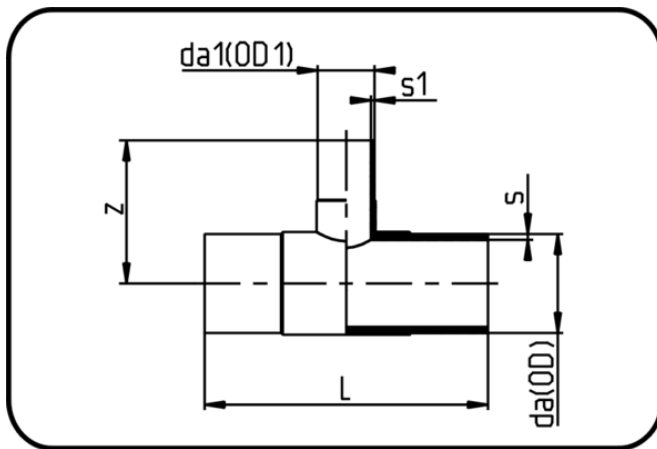

Code: 065

- Tee reduced
- long spigot
- injection moulded
- Butt+E-socket-welding
- PPR grey

Dimension	Code	Detail	da(OD) mm	da1(OD 1) mm	s mm	z mm	L mm	s1 mm	Weight
63/50	11.065.6350.17	63/50 SDR17 ISO S-8	63	50	3,8	103	220	3	0.208
75/50	11.065.7550.17	75/50 SDR17 ISO S-8	75	50	4,5	113	265	3	0.406
75/63	11.065.7563.17	75/63 SDR17 ISO S-8	75	63	4,5	117	260	3,8	0.415
90/63	11.065.9063.17	90/63 SDR17 ISO S-8	90	63	5,4	138,5	275	3,8	0.591
90/75	11.065.9075.17	90/75 SDR17 ISO S-8	90	75	5,4	138	278	4,5	0.57
110/63	11.065.1163.17	110/63 SDR17 ISO S-8	110	63	6,6	159	315	3,8	0.957
110/75	11.065.1175.17	110/75 SDR17 ISO S-8	110	75	6,6	151	315	4,5	0.85
110/90	11.065.1190.17	110/90 SDR17 ISO S-8	110	90	6,6	156	317	5,4	0.915
125/63	11.065.1263.17	125/63 SDR17 ISO S-8	125	63	7,4	170	350	3,8	1.38
125/90	11.065.1290.17	125/90 SDR17 ISO S-8	125	90	7,4	170	351	5,4	1.3
125/110	11.065.1211.17	125/110 SDR17 ISO S-8	125	110	7,4	170	340	6,6	1.235
160/63	11.065.1663.17	160/63 SDR17 ISO S-8	160	63	9,5	175	347	3,8	1.92
160/75	11.065.1675.17	160/75 SDR17 ISO S-8	160	75	9,5	179	348	4,5	1.905
160/90	11.065.1690.17	160/90 SDR17 ISO S-8	160	90	9,5	182	349	5,4	1.94
160/110	11.065.1611.17	160/110 SDR17 ISO S-8	160	110	9,5	202	400	6,6	2.36
180/90	11.065.1890.17	180/90 SDR17 ISO S-8	180	90	10,7	200	427	5,4	2.8
200/63	11.065.2063.17	200/63 SDR17 ISO S-8	200	63	11,9	225	550	3,8	4.963
200/90	11.065.2090.17	200/90 SDR17 ISO S-8	200	90	11,9	229	560	5,4	5.124
200/110	11.065.2011.17	200/110 SDR17 ISO S-8	200	110	11,9	245	560	6,6	5.22
200/125	11.065.2012.17	200/125 SDR17 ISO S-8	200	125	11,9	240	550	7,4	5.26
200/160	11.065.2016.17	200/160 SDR17 ISO S-8	200	160	11,9	265	550	9,5	6.154
225/75	11.065.2275.17	225/75 SDR17 ISO S-8	225	75	13,4	226	451	4,5	4.9
225/90	11.065.2290.17	225/90 SDR17 ISO S-8	225	90	13,4	226	450	5,4	5

Dimension	Code	Detail	da(OD) mm	da1(OD 1) mm	s mm	z mm	L mm	s1 mm	Weight
225/110	11.065.2211.17	225/110 SDR17 ISO S-8	225	110	13,4	226	449	6,6	4.96
225/160	11.065.2216.17	225/160 SDR17 ISO S-8	225	160	13,4	250	498	9,5	6.14
225/180	11.065.2218.17	225/180 SDR17 ISO S-8	225	180	13,4	280	558	10,7	7.1
250/110	11.065.2511.17	250/110 SDR17 ISO S-8	250	110	14,8	247	632	6,6	9.98
250/160	11.065.2516.17	250/160 SDR17 ISO S-8	250	160	14,8	272	630	9,5	10.54
250/200	11.065.2520.17	250/200 SDR17 ISO S-8	250	200	14,8	294	630	11,9	11.06
315/110	11.065.3111.17	315/110 SDR17 ISO S-8	315	110	18,7	292	555	6,6	11.4
315/160	11.065.3116.17	315/160 SDR17 ISO S-8	315	160	18,7	315	585	9,5	12.56
315/225	11.065.3122.17	315/225 SDR17 ISO S-8	315	225	18,7	335	650	13,4	13.98
315/250	11.065.3125.17	315/250 SDR17 ISO S-8	315	250	18,7	340	680	14,8	14.9
63/32	11.065.6332.11	63/32 SDR11 ISO S-5	63	32	5,8	103	220	2,9	0.295
63/50	11.065.6350.11	63/50 SDR11 ISO S-5	63	50	5,8	103	220	4,6	0.292
75/32	11.065.7532.11	75/32 SDR11 ISO S-5	75	32	6,8	107,5	265	2,9	0.498
75/50	11.065.7550.11	75/50 SDR11 ISO S-5	75	50	6,8	113	265	4,6	0.53
75/63	11.065.7563.11	75/63 SDR11 ISO S-5	75	63	6,8	117	260	5,8	0.537
90/63	11.065.9063.11	90/63 SDR11 ISO S-5	90	63	8,2	138,5	275	5,8	0.739
90/75	11.065.9075.11	90/75 SDR11 ISO S-5	90	75	8,2	140	278	6,8	0.796
110/63	11.065.1163.11	110/63 SDR11 ISO S-5	110	63	10	159	315	5,8	1.24
110/75	11.065.1175.11	110/75 SDR11 ISO S-5	110	75	10	151	315	6,8	1.18
110/90	11.065.1190.11	110/90 SDR11 ISO S-5	110	90	10	156	317	8,2	1.261
125/90	11.065.1290.11	125/90 SDR11 ISO S-5	125	90	11,4	170	340	8,2	1.64
125/110	11.065.1211.11	125/110 SDR11 ISO S-5	125	110	11,4	170	340	10	1.85
160/63	11.065.1663.11	160/63 SDR11 ISO S-5	160	63	14,6	175	347	5,8	2.56
160/75	11.065.1675.11	160/75 SDR11 ISO S-5	160	75	14,6	179	348	6,8	2.62
160/90	11.065.1690.11	160/90 SDR11 ISO S-5	160	90	14,6	182	349	8,2	2.62
160/110	11.065.1611.11	160/110 SDR11 ISO S-5	160	110	14,6	202	400	10	3.16
180/90	11.065.1890.11	180/90 SDR11 ISO S-5	180	90	16,4	201	427	8,2	4.24
180/110	11.065.1811.11	180/110 SDR11 ISO S-5	180	110	16,4	225	464	10	4.6
200/63	11.065.2063.11	200/63 SDR11 ISO S-5	200	63	18,2	226	560	5,8	6.94
200/90	11.065.2090.11	200/90 SDR11 ISO S-5	200	90	18,2	229	560	8,2	6.86
200/110	11.065.2011.11	200/110 SDR11 ISO S-5	200	110	18,2	245	560	10	6.98
200/125	11.065.2012.11	200/125 SDR11 ISO S-5	200	125	18,2	240	560	11,4	6.92
200/160	11.065.2016.11	200/160 SDR11 ISO S-5	200	160	18,2	275	564	14,6	8.34
225/75	11.065.2275.11	225/75 SDR11 ISO S-5	225	75	20,5	226	451	6,8	6.62
225/90	11.065.2290.11	225/90 SDR11 ISO S-5	225	90	20,5	226	450	8,2	6.66
225/110	11.065.2211.11	225/110 SDR11 ISO S-5	225	110	20,5	226	449	10	6.66
225/160	11.065.2216.11	225/160 SDR11 ISO S-5	225	160	20,5	250	498	14,6	8.22
225/180	11.065.2218.11	225/180 SDR11 ISO S-5	225	180	20,5	280	558	16,4	9.2

Dimension	Code	Detail	da(OD) mm	da1(OD 1) mm	s mm	z mm	L mm	s1 mm	Weight
250/110	11.065.2511.11	250/110 SDR11 ISO S-5	250	110	22,7	247	632	10	12.46
250/160	11.065.2516.11	250/160 SDR11 ISO S-5	250	160	22,7	272	630	14,6	12.96
250/200	11.065.2520.11	250/200 SDR11 ISO S-5	250	200	22,7	294	630	18,2	14.06
315/110	11.065.3111.11	315/110 SDR11 ISO S-5	315	110	28,6	292	555	10	15.68
315/160	11.065.3116.11	315/160 SDR11 ISO S-5	315	160	28,6	315	585	14,6	17.02
315/225	11.065.3122.11	315/225 SDR11 ISO S-5	315	225	28,6	335	650	20,5	20.58
315/250	11.065.3125.11	315/250 SDR11 ISO S-5	315	250	28,6	340	680	22,7	21.84