


Fittings

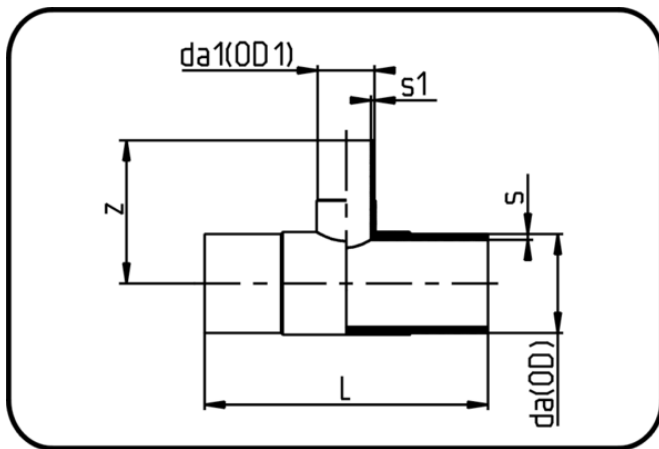

Code: 065

- Tee reduced
- long spigot
- injection moulded
- Butt+IR+HPF-welding
- PVDF natural

Dimension	Code	Detail	da(OD) mm	da1(OD 1) mm	s mm	z mm	L mm	s1 mm	Weight
110/90	30.065.1190.33	110/90 SDR33 ISO S-16	110	90	3,4	150	313	2,8	0.993
160/90	30.065.1690.33	160/90 SDR33 ISO S-16	160	90	4,9	183	348	2,8	2.4
160/110	30.065.1611.33	160/110 SDR33 ISO S-16	160	110	4,9	183	349	3,4	2.7
63/20	30.065.6320.21	63/20 SDR21 ISO S-10	63	20	3	75	150	1,9	0.221
63/25	30.065.6325.21	63/25 SDR21 ISO S-10	63	25	3	75	150	1,9	0.221
63/32	30.065.6332.21	63/32 SDR21 ISO S-10	63	32	3	74	149	2,4	0.221
90/63	30.065.9063.21	90/63 SDR21 ISO S-10	90	63	4,3	129	263	3	0.79
110/63	30.065.1163.21	110/63 SDR21 ISO S-10	110	63	5,3	150	312	3	1.232
110/90	30.065.1190.21	110/90 SDR21 ISO S-10	110	90	5,3	150	313	4,3	1.36
160/63	30.065.1663.21	160/63 SDR21 ISO S-10	160	63	7,7	175	345	3	2.78
160/90	30.065.1690.21	160/90 SDR21 ISO S-10	160	90	7,7	183	348	4,3	3.25
160/110	30.065.1611.21	160/110 SDR21 ISO S-10	160	110	7,7	183	349	5,3	3.49
90/63	30.065.9063.31	90/63 SDR33/21 MOP 10 bar	90	63	2,8	129	263	3	0.582
110/63	30.065.1163.31	110/63 SDR33/21 MOP 10 bar	110	63	3,4	150	315	3	0.935
160/63	30.065.1663.31	160/63 SDR33/21 MOP 10 bar	160	63	4,9	175	348	3	2.055
160/90	30.065.1690.31	160/90 SDR33/21 MOP 10 bar	160	90	4,9	183	348	4,3	2.52
160/110	30.065.1611.31	160/110 SDR33/21 MOP 10 bar	160	110	4,9	185	347	5,3	2.83