


## T-stuk 90°, PVC-U metrisch

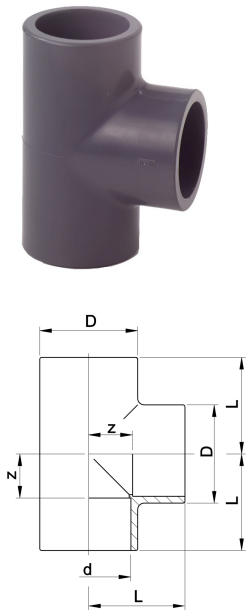

| d<br>(mm) | d<br>(inch) | PN<br>(bar) | code        | SP | gewicht<br>(kg) | D<br>(mm) | L<br>(mm) | z<br>(mm) |
|-----------|-------------|-------------|-------------|----|-----------------|-----------|-----------|-----------|
| 6         |             | 16          | 721 200 101 | 10 | 0,004           | 11        | 16        | 4         |
| 8         |             | 16          | 721 200 102 | 10 | 0,008           | 13        | 17        | 5         |
| 10        |             | 16          | 721 200 103 | 10 | 0,008           | 16        | 18        | 6         |
| 12        |             | 16          | 721 200 104 | 10 | 0,011           | 19        | 19        | 7         |
| 16        |             | 16          | 721 200 105 | 10 | 0,011           | 21        | 23        | 9         |
| 20        |             | 16          | 721 200 106 | 10 | 0,019           | 25        | 27        | 11        |
| 25        |             | 16          | 721 200 107 | 10 | 0,029           | 31        | 33        | 14        |
| 32        |             | 16          | 721 200 108 | 10 | 0,055           | 38        | 39        | 17        |
| 40        |             | 16          | 721 200 109 | 10 | 0,100           | 48        | 49        | 23        |
| 50        |             | 16          | 721 200 110 | 10 | 0,156           | 58        | 57        | 26        |
| 63        |             | 16          | 721 200 111 | 10 | 0,291           | 73        | 71        | 33        |
| 75        | 2 ½         | 16          | 721 200 112 | 5  | 0,476           | 87        | 83        | 39        |
| 90        |             | 16          | 721 200 113 | 4  | 0,824           | 105       | 97        | 46        |
| 110       |             | 16          | 721 200 114 | 6  | 1,411           | 127       | 116       | 55        |
| 125       |             | 16          | 721 200 115 | 2  | 2,521           | 151       | 135       | 66        |
| 140       | 5           | 16          | 721 200 116 | 1  | 3,410           | 169       | 147       | 71        |
| 160       |             | 16          | 721 200 117 | 1  | 4,982           | 193       | 167       | 81        |
| 200       |             | 10          | 721 200 119 | 1  | 5,868           | 225       | 207       | 101       |
| 225       |             | 10          | 721 200 120 | 1  | 9,268           | 256       | 233       | 114       |
| 250       |             | 10          | 721 200 121 | 1  | 14,350          | 282       | 263       | 132       |
| 280       |             | 10          | 721 200 122 | 1  | 19,541          | 318       | 298       | 152       |
| 315       |             | 6           | 721 200 123 | 1  | 27,254          | 356       | 332       | 168       |
| 400       |             | 6           | 721 200 125 | 1  | 35,000          | 442       | 420       | 214       |

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: [info.ps@georgfischer.com](mailto:info.ps@georgfischer.com)

Internet: <http://www.gfps.com>