


## Fittings with short Spigot

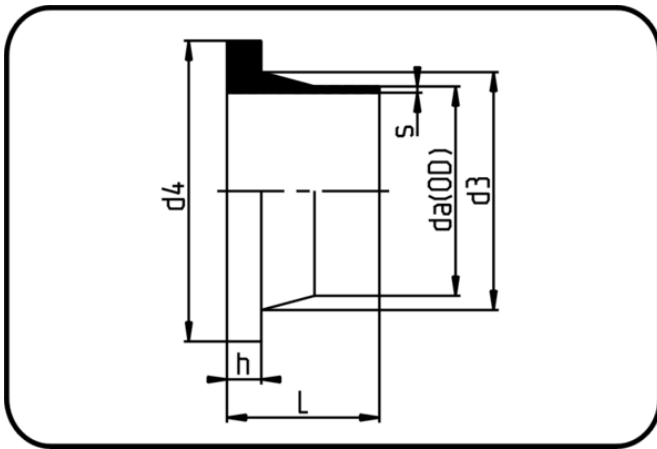

Code: 012

- **Stub Flange DIN**
- short spigot
- flame retardant & el-conduct.
- injection moulded
- **Butt-welding**
- **PPs-el black**

Dimension	Code	Detail	da(OD) mm	s mm	L mm	d3 mm	d4 mm	h mm	Weight
110	19.012.0110.33	110X3,4 SDR33 MOP<1,5bar	110	3,4	80	125	158	18	0.375
160	19.012.0160.33	160X4,9 SDR33 MOP<1,5bar	160	4,9	80	175	212	18	0.684
200	19.012.0200.33	200X6,2 SDR33 MOP<1,5bar	200	6,2	113	232	268	18	1.28
225	19.012.0225.33	225X6,9 SDR33 MOP<1,5bar	225	6,9	113	235	268	18	1.03
250	19.012.0250.33	250X7,7 SDR33 MOP<1,5bar	250	7,7	132	285	320	20	2.22
315	19.012.0315.33	315X9,7 SDR33 MOP<1,5bar	315	9,7	136	335	370	20	2.54
110	19.012.0110.17	110X6,6 SDR17 MOP<3,5bar	110	6,6	80	125	158	18	0.46
160	19.012.0160.17	160X9,5 SDR17 MOP<3,5bar	160	9,5	92	175	212	18	0.884
200	19.012.0200.17	200X11,9 SDR17 MOP<3,5bar	200	11,9	110	232	268	24	1.88
32	19.012.0032.11	32X2,9 SDR11 MOP<6bar	32	2,9	50	40	68	10	0.053
50	19.012.0050.11	50X4,6 SDR11 MOP<6bar	50	4,6	53	61	88	12	0.112
63	19.012.0063.11	63X5,8 SDR11 MOP<6bar	63	5,8	50	75	102	14	0.16
75	19.012.0075.11	75X6,8 SDR11 MOP<6bar	75	6,8	50,5	89	122	16	0.242
90	19.012.0090.11	90X8,2 SDR11 MOP<6bar	90	8,2	82	105	138	17	0.41
110	19.012.0110.11	110X10,0 SDR11 MOP<6bar	110	10	82	125	158	18	0.57