


Fittings with short Spigot

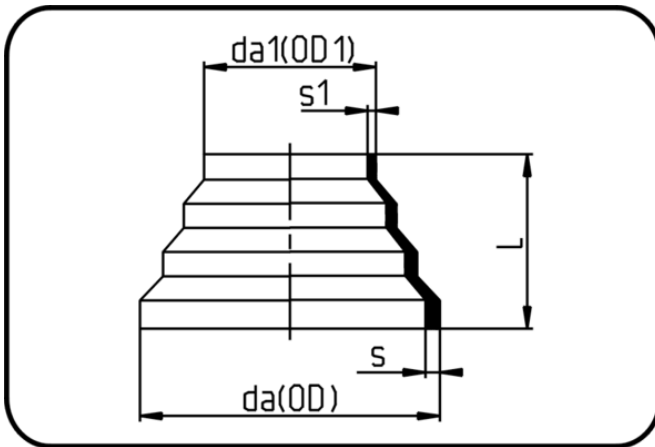

Code: 007

- Reducer concentric
- short spigot
- injection moulded
- Butt-welding
- PE 100 black

| Dimension | Code | Detail | da(OD) mm | da1(OD1) mm | s mm | L mm | s1 mm | Weight |
|-----------|----------------|------------------------|--------------|----------------|---------|---------|----------|--------|
| 110/63 | 25.007.1163.33 | 110/63 SDR33 ISO S-16 | 110 | 63 | 3,4 | 62 | 2 | 0.052 |
| 125/75 | 25.007.1275.33 | 125/75 SDR33 ISO S-16 | 125 | 75 | 3,9 | 72 | 2,3 | 0.104 |
| 160/110 | 25.007.1611.33 | 160/110 SDR33 ISO S-16 | 160 | 110 | 4,9 | 83 | 3,4 | 0.174 |
| 225/160 | 25.007.2216.33 | 225/160 SDR33 ISO S-16 | 225 | 160 | 6,9 | 90 | 4,9 | 0.41 |
| 315/225 | 25.007.3122.33 | 315/225 SDR33 ISO S-16 | 315 | 225 | 9,7 | 130 | 6,9 | 1.16 |
| 450/315 | 25.007.4531.33 | 450/315 SDR33 ISO S-16 | 450 | 315 | 13,8 | 170 | 9,7 | 3.6 |
| 630/450 | 25.007.6345.33 | 630/450 SDR33 ISO S-16 | 630 | 450 | 19,3 | 188 | 13,8 | 9.2 |
| 75/32 | 25.007.7532.17 | 75/32 SDR17 ISO S-8 | 75 | 32 | 4,5 | 71 | 1,9 | 0.041 |
| 110/63 | 25.007.1163.17 | 110/63 SDR17 ISO S-8 | 110 | 63 | 6,6 | 62 | 3,8 | 0.096 |
| 125/75 | 25.007.1275.17 | 125/75 SDR17 ISO S-8 | 125 | 75 | 7,4 | 72 | 4,5 | 0.164 |
| 160/110 | 25.007.1611.17 | 160/110 SDR17 ISO S-8 | 160 | 110 | 9,5 | 83 | 6,6 | 0.291 |
| 225/160 | 25.007.2216.17 | 225/160 SDR17 ISO S-8 | 225 | 160 | 13,4 | 90 | 9,5 | 0.683 |
| 315/225 | 25.007.3122.17 | 315/225 SDR17 ISO S-8 | 315 | 225 | 18,7 | 130 | 13,4 | 1.92 |
| 450/315 | 25.007.4531.17 | 450/315 SDR17 ISO S-8 | 450 | 315 | 26,7 | 167 | 18,7 | 5.14 |
| 630/450 | 25.007.6345.17 | 630/450 SDR17 ISO S-8 | 630 | 450 | 37,4 | 188 | 26,7 | 11.6 |
| 63/16 | 25.007.6316.11 | 63/16 SDR11 ISO S-5 | 63 | 16 | 5,8 | 97 | 1,8 | 0.043 |
| 75/32 | 25.007.7532.11 | 75/32 SDR11 ISO S-5 | 75 | 32 | 6,8 | 71 | 3 | 0.059 |
| 110/63 | 25.007.1163.11 | 110/63 SDR11 ISO S-5 | 110 | 63 | 10 | 62 | 5,8 | 0.139 |
| 125/75 | 25.007.1275.11 | 125/75 SDR11 ISO S-5 | 125 | 75 | 11,4 | 72 | 6,8 | 0.225 |
| 160/110 | 25.007.1611.11 | 160/110 SDR11 ISO S-5 | 160 | 110 | 14,6 | 83 | 10 | 0.429 |
| 225/160 | 25.007.2216.11 | 225/160 SDR11 ISO S-5 | 225 | 160 | 20,5 | 90 | 14,6 | 1.02 |
| 315/225 | 25.007.3122.11 | 315/225 SDR11 ISO S-5 | 315 | 225 | 28,6 | 130 | 20,5 | 2.68 |
| 450/315 | 25.007.4531.11 | 450/315 SDR11 ISO S-5 | 450 | 315 | 40,9 | 181 | 28,6 | 7.82 |