


**drukhouventiel type 586 SYGEF Standaard, PVDF
met 3-delige koppeling met lasmof, metrisch
zonder manometer**

uitvoering:

- membraan PTFE / EPDM
- geïntegreerde draadbussen (inserts) voor de bevestiging van de afsluiter
- 0.5-9.0 bar (7-130 psi)

0.3-3.0 bar (4-44 psi) op aanvraag
manometer op aanvraag

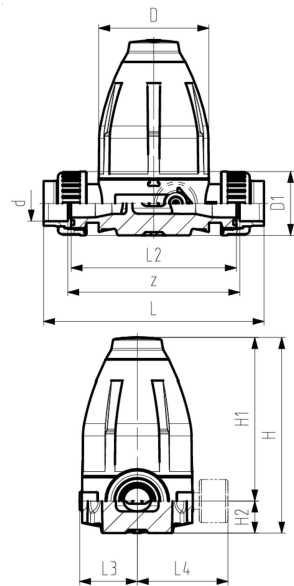

d (mm)	DN (mm)	PN (bar)	O-ring FPM Code	SP	gewicht (kg)
20	15	10	185 586 112	1	0,780
25	20	10	185 586 113	1	1,670
32	25	10	185 586 114	1	1,720
40	32	10	185 586 115	1	4,700
50	40	10	185 586 116	1	4,790
63	50	10	185 586 117	1	5,090

d (mm)	D (mm)	H (mm)	H1 (mm)	H2 (mm)	H3 (mm)	L (mm)	L2 (mm)	L3 (mm)	L5 (mm)	M	z (mm)	inch bena- dering (inch)
20	79	132	111	21	12	158	120	42	40	M6	130	1/2
25	100	177	148	29	14	192	150	53	46	M6	160	3/4
32	100	177	148	29	14	196	150	53	46	M6	160	1
40	147	251	207	44	21	255	205	76	65	M8	215	1 1/4
50	147	251	207	44	21	261	205	76	65	M8	215	1 1/2
63	147	251	207	44	21	269	205	76	65	M8	215	2

De technische gegevens zijn niet bindend en houden geen garanties in van eigenschappen. Wijzigingen voorbehouden. Onze algemene verkoopvoorwaarden zijn van toepassing.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>