

12 VDC 24 VDC

5
YEAR
Product & Labor
WARRANTY

We Brighten Your Brands



Quantum Power Supplies

IP68-rated drivers
for sign applications

A Quantum Leap

in Versatility, Safety, and Reliability

IP68 12 24
VDC VDC

The Quantum Series from SloanLED is a complete suite of IP68-rated power supplies, engineered to deliver quality, power, and reliability in sign applications of all sizes.


- European input voltage: 200-240 VAC, 50-60 Hz
- Auto-resetting – No fuses to replace or circuit breaker to reset – Short circuit protection automatically resets when short condition is corrected
- Simple secondary hook-ups – no minimum load or load balancing required
- White housing and compact design for ease and flexibility in sign application installations
- 5-year product and limited labor warranty

Small form factor for easy installation

Double-insulated cables for greater safety and reliability



Choose the power supply solution that's right for you:



12V

Quantum 30 W
701507-30E1

Quantum 60 W
701507-60E1

Quantum 60 W
701507-60E1

Quantum 100 W
701507-100E1


24V

Quantum 30 W
701895-30E1

Quantum 60 W
701895-60E1

Quantum 100 W
701895-100E1

Quantum 150 W
701895-150E1

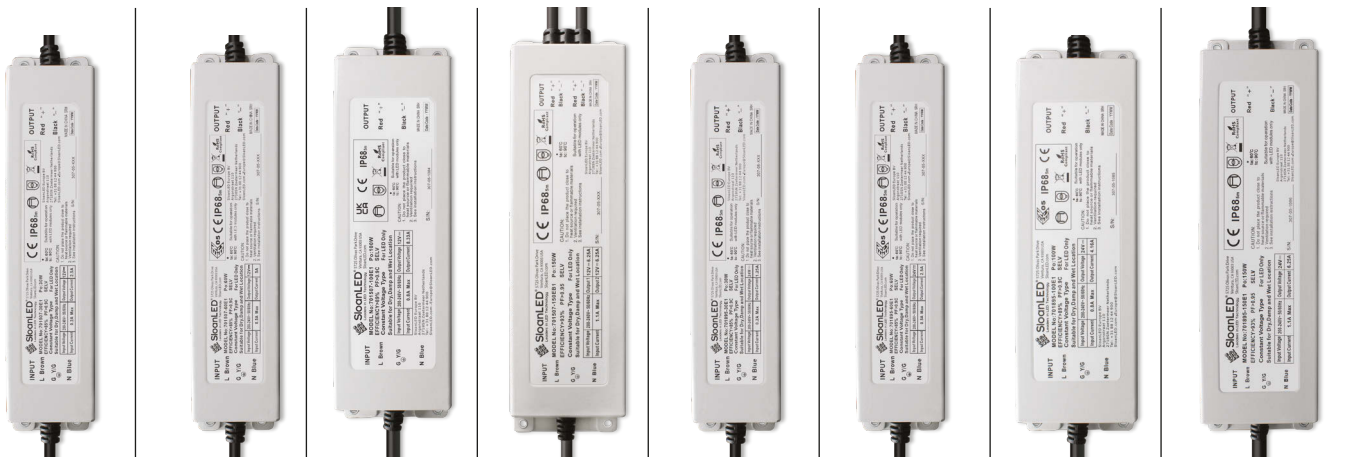


For more information on SloanLED Power Supplies, visit SloanLED.com.

Quantum 12 V Power Supplies

Compatible with SloanLED 12 VDC products

Specifications

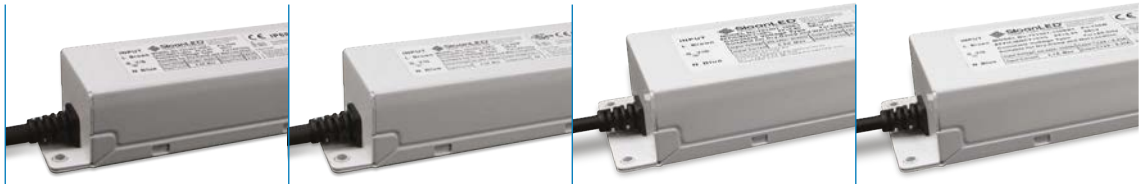

	Quantum 30 W, 12 V 701507-30E1	Quantum 60 W, 12 V 701507-60E1	Quantum 100 W, 12 V 701507-100E1	Quantum 150 W, 12 V 701507-150EB1	
INPUT	Rated input voltage	200-240 VAC	200-240 VAC	200-240 VAC	
	Max. input voltage	180-264 VAC	180-264 VAC	180-264 VAC	
	Frequency	50 Hz	50 Hz	50 Hz	
	Rated input current	0.2 A max.	0.5 A max.	0.8 A max.	
	Inrush current	20 A max. @ 240 VAC, 50 Hz	50 A max. @ 240 VAC, 50 Hz	<50 A max. @ 240 VAC, 50 Hz	70 A max. @ 240 VAC, 50 Hz
	Efficiency	>88% @ 240 VAC (full-load)	>88% @ 240 VAC (full-load)	>89% @ 240 VAC (full-load)	>90% @ 240 VAC (full-load)
	Power factor	>0.95 @ 240 VAC (full-load); >0.90 @ 240 VAC (65% load)	>0.95 @ 240 VAC (full-load); >0.90 @ 240 VAC (65% load)	>0.90 @ 240 VAC (full-load); >0.95 @ 240 VAC (65% load)	>0.95 @ 240 VAC (full-load); >0.90 @ 240 VAC (65% load)
THD	<20% @ 120-277 VAC (full-load); <20% @ 277 VAC (65% load)	<20% @ 120-277 VAC (full-load); <20% @ 277 VAC (65% load)	<20% @ 230 VAC (full-load)	<20% @ 120-277 VAC (full-load); <20% @ 277 VAC (65% load)	
OUTPUT	Rated output voltage	12 VDC	12 VDC	12 VDC	
	Rated output current	2.5 ADC	5 ADC	8.33 ADC	Dual outputs (6.25 ADC each)
	Max. output power	30 W	60 W	100 W	150 W
	Ripple and noise	2Vp-p	2Vp-p	240 mVp-p	240 mVp-p
	Line regulation	<1%	<1%	<1%	<1%
	Load regulation	<3%	<3%	<3%	<3%
PROTECTION	Over current	Yes, auto-recovery	Yes, auto-recovery	Yes, auto-recovery	Yes, auto-recovery
	Over temperature	Yes, 100° C to 110° C case, auto-recovery	Yes, 100° C to 110° C case, auto-recovery	Yes, 100° C to 110° C case, auto-recovery	Yes, 100° C to 110° C case, auto-recovery
	Short circuit	Yes, auto-recovery	Yes, auto-recovery	Yes, auto-recovery	Yes, auto-recovery
	Surge immunity	Line – Earth → 4 kV Line – Neutral → 2 kV	Line – Earth → 4 kV Line – Neutral → 2 kV	Line – Earth → 4 kV Line – Neutral → 2 kV	Line – Earth → 4 kV Line – Neutral → 2 kV
ENVIRONMENT	Operating ambient temp.	-40° C to +60° C, derated up to 70° C with 50% of load	-40° C to +60° C, derated up to 70° C with 50% of load	-40° C to +60° C, derated up to 70° C with 50% of load	-40° C to +60° C, derated up to 70° C with 50% of load
	Max. case temp.	90° C	90° C	90° C	90° C
	Storage temp.	-40° C to +85° C	-40° C to +85° C	-40° C to +85° C	-40° C to +85° C
	IP rating	IP68	IP68	IP68	IP68
	Lifetime	25,000 hours @ +60° C ambient with 100 % load	25,000 hours @ +60° C ambient with 100 % load	>25,000 hours @ +60° C ambient with 100 % load	25,000 hours @ +60° C ambient with 100 % load
COMPLIANCE	Safety standard	CE (EN 61347-2-13 : 2014 + A1:2017 ; EN 61347-1 : 2015)	CE (EN 61347-2-13 : 2014 + A1:2017 ; EN 61347-1 : 2015 1)	CE (EN61347-2-13:2014; EN61347-1:2008)	CE (EN 61347-2-13 : 2014 + A1:2017 ; EN 61347-1 : 2015)
	EMC/EMI standard	IEC/EN 55015:2019; EN 61000-3-3:2013/A1:2019; EN 61547:2009/A1:2017	IEC/EN 55015:2019; EN 61000-3-3:2013/A1:2019; EN 61547:2009/A1:2017	IEC/EN 55015:2019; EN 61000-3-3:2013/A1:2019; EN 61547:2009/A1:2017	IEC/EN 55015:2019; EN 61000-3-3:2013/A1:2019; EN 61547:2009/A1:2017
	Harmonic current emission	EN 61000-3-2 : 2019 Class C	EN 61000-3-2 : 2019 Class C	EN 61000-3-2 : 2019 Class C	EN 61000-3-2 : 2019 Class C
	Surge	IEC 61000-4-5:2014+A1:2017-CSV	IEC 61000-4-5:2014+A1:2017-CSV	IEC 61000-4-5:2014+A1:2017-CSV	IEC 61000-4-5:2014+A1:2017-CSV
Dimensions L x W x H	202 mm x 44 mm x 33 mm (7.6 in x 1.7 in x 1.3 in)	202 mm x 44 mm x 33 mm (8.0 in x 1.7 in x 1.3 in)	210 mm x 62 mm x 34 mm (8.3 in x 2.4 in x 1.3 in)	234 mm x 66 mm x 34 mm (9.2 in x 2.6 in x 1.3 in)	

Safety and compliance.


Safety and environmental impact are important to us, and our power supplies meet stringent safety requirements, and international agency standards.



Quantum 24 V Power Supplies

Compatible with SloanLED 24 VDC products

Specifications

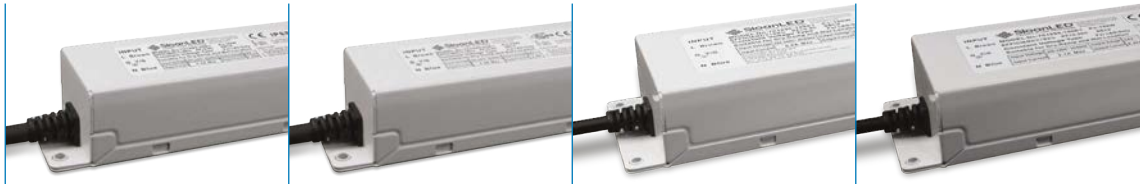

	Quantum 30 W, 24 V 701895-30E1	Quantum 60 W, 24 V 701895-60E1	Quantum 100 W, 24 V 701895-100E1	Quantum 150 W, 24 V 701895-150E1	
INPUT	Rated input voltage	200-240 VAC	200-240 VAC	200-240 VAC	200-240 VAC
	Max. input voltage	180-264 VAC	180-264 VAC	180-264 VAC	180-264 VAC
	Frequency	50 Hz	50 Hz	50 Hz	50 Hz
	Rated input current	0.2 A max.	0.5 A max.	0.8 A max.	1.1 A max.
	Inrush current	20 A max. @ 240 VAC, 50 Hz	50 A max. @ 240 VAC, 50 Hz	50 A max. @ 240 VAC, 50 Hz	70 A max. @ 240 VAC, 50 Hz
	Efficiency	>88% @ 240 VAC (full-load)	>88% @ 240 VAC (full-load)	>89% @ 240 VAC (full-load)	>89% @ 240 VAC (full-load)
	Power factor	>0.95 @ 240 VAC (full-load); >0.90 @ 240 VAC (65% load)	>0.95 @ 240 VAC (full-load); >0.90 @ 240 VAC (65% load)	>0.95 @ 240 VAC (full-load); >0.90 @ 240 VAC (65% load)	>0.95 @ 240 VAC (full-load); >0.90 @ 240 VAC (65% load)
THD	<20% @ 120-277 VAC (full-load); <20% @ 277 VAC (65% load)	<20% @ 120-277 VAC (full-load); <20% @ 277 VAC (65% load)	<20% @ 120-277 VAC (full-load); <20% @ 277 VAC (65% load)	<20% @ 120-277 VAC (full-load); <20% @ 277 VAC (65% load)	
OUTPUT	Rated output voltage	24 VDC	24 VDC	24 VDC	24 VDC
	Rated output current	1.25 ADC	2.5 ADC	4.16 ADC	6.25 ADC
	Max. output power	30 W	60 W	100 W	150 W
	Ripple and noise	2Vp-p	2Vp-p	240 mVp-p	240 mVp-p
	Line regulation	<1%	<1%	<1%	<1%
	Load regulation	<3%	<3%	<3%	<3%
PROTECTION	Over current	Yes, auto-recovery	Yes, auto-recovery	Yes, auto-recovery	Yes, protected, no auto-recovery. To recover, turn AC off/on.
	Over temperature	Yes, 100° C to 110° C case, auto-recovery	Yes, 100° C to 110° C case, auto-recovery	Yes, 100° C to 110° C case, auto-recovery	Yes, 100° C to 110° C case, auto-recovery
	Short circuit	Yes, auto-recovery	Yes, auto-recovery	Yes, auto-recovery	Yes, auto-recovery
	Surge immunity	Line – Earth → 4 kV Line – Neutral → 2 kV	Line – Earth → 4 kV Line – Neutral → 2 kV	Line – Earth → 4 kV Line – Neutral → 2 kV	Line – Earth → 4 kV Line – Neutral → 2 kV
ENVIRONMENT	Operating ambient temp.	-40° C to +60° C, derated up to 70° C with 50% of load	-40° C to +60° C, derated up to 70° C with 50% of load	-40° C to +60° C, derated up to 70° C with 50% of load	-40° C to +60° C, derated up to 70° C with 50% of load
	Max. case temp.	90° C	90° C	90° C	90° C
	Storage temp.	-40° C to +85° C	-40° C to +85° C	-40° C to +85° C	-40° C to +85° C
	IP rating	IP68	IP68	IP68	IP68
	Lifetime	25,000 hours @ +60° C ambient with 100 % load	25,000 hours @ +60° C ambient with 100 % load	25,000 hours @ +60° C ambient with 100 % load	25,000 hours @ +60° C ambient with 100 % load
COMPLIANCE	Safety standard	CE (EN61347-2-13:2014+A1:2017; EN 61347-1:2015)	CE (EN 61347-2-13 : 2014 + A1:2017; EN 61347-1 : 2015)	CE (EN61347-2-13:2014+A1:2017; EN 61347-1:2015)	CE (EN61347-2-13:2014+A1:2017; EN 61347-1:2015)
	EMC/EMI standard	IEC/EN 55015:2019; EN 61000-3-3:2013/ A1:2019; EN 61547: 2009	IEC/EN 55015:2019; EN 61000-3-3:2013/ A1:2019; EN 61547: 2009	IEC/EN 55015:2019; EN 61000-3-3:2013/ A1:2019; EN 61547: 2009	IEC/EN 55015:2019; EN 61000-3-3:2013/ A1:2019; EN 61547: 2009
	Harmonic current emission	IEC/EN 61000-3-2 : 2019 Class C	EN 61000-3-2 : 2019 Class C	EN 61000-3-2 : 2019 Class C	EN 61000-3-2 : 2019 Class C
	Surge	IEC 61000-4-5:2014+A1:2017-CSV	IEC 61000-4-5:2014+A1:2017-CSV	IEC 61000-4-5:2014+A1:2017-CSV	IEC 61000-4-5:2014+A1:2017-CSV
Dimensions	202 mm × 44 mm × 33 mm (7.6 in × 1.7 in × 1.3 in)	202 mm × 44 mm × 33 mm (8.0 in × 1.7 in × 1.3 in)	210 mm × 62 mm × 34 mm (8.3 in × 2.4 in × 1.3 in)	234 mm × 66 mm × 34 mm (9.2 in × 2.6 in × 1.3 in)	

SloanLED Headquarters
5725 Olivas Park Drive, Ventura, CA, USA
805.676.3200 • info@SloanLED.com

SloanLED Europe b.v.
Argonstraat 110, 2718 SN Zoetermeer, NL
+31 88 12 44 900 • europe@SloanLED.com



SloanLED.com

© 2022 SloanLED Rev B 2022-08-31



Specifications subject to change without notice.

SloanLED
Leaders in LED Technology