


Elongated Fittings

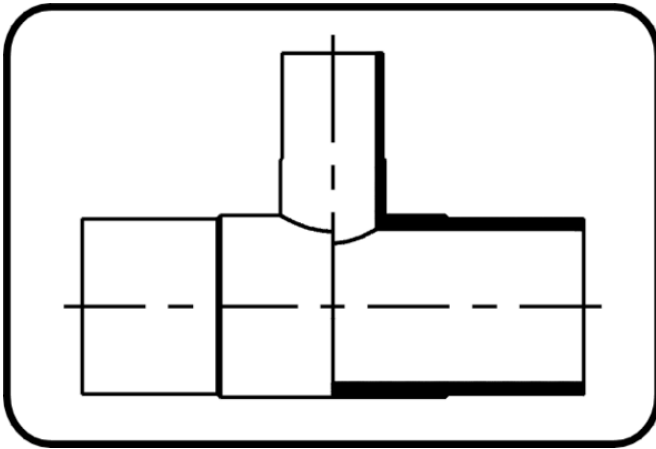

Code: 065

- Tee reduced
- long spigot
- injection moulded
- Butt + E-socket-welding
- PE 100-RC black

Dimension	Code	Detail	Unit	Weight
63/50	70.065.6350.11	63/50 SDR11 ISO S-5	piece	0.31
75/63	70.065.7563.11	75/63 SDR11 ISO S-5	piece	0.552
90/63	70.065.9063.11	90/63 SDR11 ISO S-5	piece	0.76
90/75	70.065.9075.11	90/75 SDR11 ISO S-5	piece	0.821
110/63	70.065.1163.11	110/63 SDR11 ISO S-5	piece	1.24
110/75	70.065.1175.11	110/75 SDR11 ISO S-5	piece	1.22
110/90	70.065.1190.11	110/90 SDR11 ISO S-5	piece	1.27
125/75	70.065.1275.11	125/75 SDR11 ISO S-5	piece	1.82
125/90	70.065.1290.11	125/90 SDR11 ISO S-5	piece	1.7
125/110	70.065.1211.11	125/110 SDR11 ISO S-5	piece	1.92
160/63	70.065.1663.11	160/63 SDR11 ISO S-5	piece	2.62
160/75	70.065.1675.11	160/75 SDR11 ISO S-5	piece	2.68
160/90	70.065.1690.11	160/90 SDR11 ISO S-5	piece	2.64
160/110	70.065.1611.11	160/110 SDR11 ISO S-5	piece	3.26
180/90	70.065.1890.11	180/90 SDR11 ISO S-5	piece	4.42
180/110	70.065.1811.11	180/110 SDR11 ISO S-5	piece	4.72
180/160	70.065.1816.11	180/160 SDR11 ISO S-5	piece	4.7
200/63	70.065.2063.11	200/63 SDR11 ISO S-5	piece	7.14
200/90	70.065.2090.11	200/90 SDR11 ISO S-5	piece	7.16
200/110	70.065.2011.11	200/110 SDR11 ISO S-5	piece	7.35
200/125	70.065.2012.11	200/125 SDR11 ISO S-5	piece	7.34
200/160	70.065.2016.11	200/160 SDR11 ISO S-5	piece	8.6
225/75	70.065.2275.11	225/75 SDR11 ISO S-5	piece	6.82



Dimension	Code	Detail	Unit	Weight
225/90	70.065.2290.11	225/90 SDR11 ISO S-5	piece	6.86
225/110	70.065.2211.11	225/110 SDR11 ISO S-5	piece	6.9
225/160	70.065.2216.11	225/160 SDR11 ISO S-5	piece	8.46
225/180	70.065.2218.11	225/180 SDR11 ISO S-5	piece	10.04
250/75	70.065.2575.11	250/75 SDR11 ISO S-5	piece	13.12
250/110	70.065.2511.11	250/110 SDR11 ISO S-5	piece	12.96
250/160	70.065.2516.11	250/160 SDR11 ISO S-5	piece	13.74
250/180	70.065.2518.11	250/180 SDR11 ISO S-5	piece	13.4
250/200	70.065.2520.11	250/200 SDR11 ISO S-5	piece	14.54
315/90	70.065.3190.11	315/90 SDR11 ISO S-5	piece	16.02
315/110	70.065.3111.11	315/110 SDR11 ISO S-5	piece	15.9
315/125	70.065.3112.11	315/125 SDR11 ISO S-5	piece	17.315
315/160	70.065.3116.11	315/160 SDR11 ISO S-5	piece	17.52
315/180	70.065.3118.11	315/180 SDR11 ISO S-5	piece	20.8
315/200	70.065.3120.11	315/200 SDR11 ISO S-5	piece	21
315/225	70.065.3122.11	315/225 SDR11 ISO S-5	piece	20
315/250	70.065.3125.11	315/250 SDR11 ISO S-5	piece	22.84
400/110	70.065.4011.11	400/110 SDR11 ISO S-5	piece	48.82
400/160	70.065.4016.11	400/160 SDR11 ISO S-5	piece	49.02
400/200	70.065.4020.11	400/200 SDR11 ISO S-5	piece	49.4
400/225	70.065.4022.11	400/225 SDR11 ISO S-5	piece	50.2
400/250	70.065.4025.11	400/250 SDR11 ISO S-5	piece	50.48
400/315	70.065.4031.11	400/315 SDR11 ISO S-5	piece	52.56