


Fittings with short Spigot

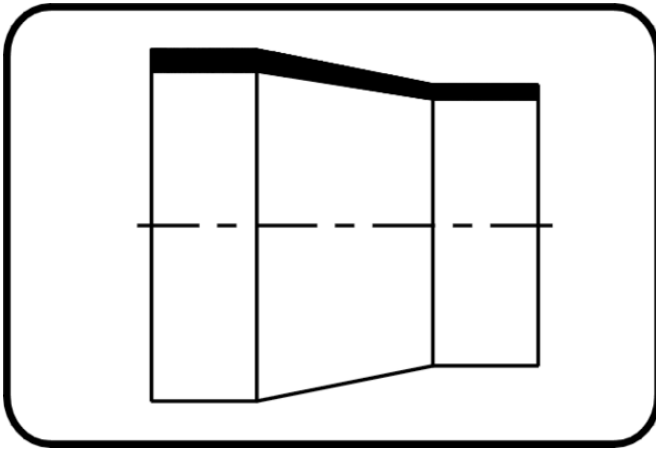

Code: 009

- Reducer concentric
- short spigot
- injection moulded
- Butt-welding
- PE 100-RC black

Dimension	Code	Detail	Unit	Weight
75/63	70.009.7563.11	75/63 SDR11 ISO S-5	piece	0.077
90/63	70.009.9063.11	90/63 SDR11 ISO S-5	piece	0.113
90/75	70.009.9075.11	90/75 SDR11 ISO S-5	piece	0.128
110/50	70.009.1150.11	110/50 SDR11 ISO S-5	piece	0.24
110/63	70.009.1163.11	110/63 SDR11 ISO S-5	piece	0.2
110/75	70.009.1175.11	110/75 SDR11 ISO S-5	piece	0.215
110/90	70.009.1190.11	110/90 SDR11 ISO S-5	piece	0.23
125/63	70.009.1263.11	125/63 SDR11 ISO S-5	piece	0.293
125/75	70.009.1275.11	125/75 SDR11 ISO S-5	piece	0.32
125/90	70.009.1290.11	125/90 SDR11 ISO S-5	piece	0.304
125/110	70.009.1211.11	125/110 SDR11 ISO S-5	piece	0.329
140/75	70.009.1475.11	140/75 SDR11 ISO S-5	piece	0.459
140/90	70.009.1490.11	140/90 SDR11 ISO S-5	piece	0.47
140/110	70.009.1411.11	140/110 SDR11 ISO S-5	piece	0.486
140/125	70.009.1412.11	140/125 SDR11 ISO S-5	piece	0.445
160/90	70.009.1690.11	160/90 SDR11 ISO S-5	piece	0.52
160/110	70.009.1611.11	160/110 SDR11 ISO S-5	piece	0.63
160/125	70.009.1612.11	160/125 SDR11 ISO S-5	piece	0.65
160/140	70.009.1614.11	160/140 SDR11 ISO S-5	piece	0.66
180/90	70.009.1890.11	180/90 SDR11 ISO S-5	piece	0.98
180/110	70.009.1811.11	180/110 SDR11 ISO S-5	piece	1.093
180/125	70.009.1812.11	180/125 SDR11 ISO S-5	piece	0.865
180/140	70.009.1814.11	180/140 SDR11 ISO S-5	piece	1.03



Dimension	Code	Detail	Unit	Weight
180/160	70.009.1816.11	180/160 SDR11 ISO S-5	piece	0.96
200/140	70.009.2014.11	200/140 SDR11 ISO S-5	piece	1.174
200/160	70.009.2016.11	200/160 SDR11 ISO S-5	piece	1.24
200/180	70.009.2018.11	200/180 SDR11 ISO S-5	piece	1.361
225/140	70.009.2214.11	225/140 SDR11 ISO S-5	piece	1.82
225/160	70.009.2216.11	225/160 SDR11 ISO S-5	piece	1.508
225/180	70.009.2218.11	225/180 SDR11 ISO S-5	piece	1.9
225/200	70.009.2220.11	225/200 SDR11 ISO S-5	piece	1.93
250/160	70.009.2516.11	250/160 SDR11 ISO S-5	piece	2
250/180	70.009.2518.11	250/180 SDR11 ISO S-5	piece	2.12
250/200	70.009.2521.11	250/200 SDR11 ISO S-5	piece	2.12
250/225	70.009.2522.11	250/225 SDR11 ISO S-5	piece	2.41
280/200	70.009.2820.11	280/200 SDR11 ISO S-5	piece	3.14
280/225	70.009.2822.11	280/225 SDR11 ISO S-5	piece	3.34
280/250	70.009.2825.11	280/250 SDR11 ISO S-5	piece	3.62
315/200	70.009.3120.11	315/200 SDR11 ISO S-5	piece	4.14
315/225	70.009.3122.11	315/225 SDR11 ISO S-5	piece	4.2
315/250	70.009.3125.11	315/250 SDR11 ISO S-5	piece	4.34
315/280	70.009.3128.11	315/280 SDR11 ISO S-5	piece	4.56