


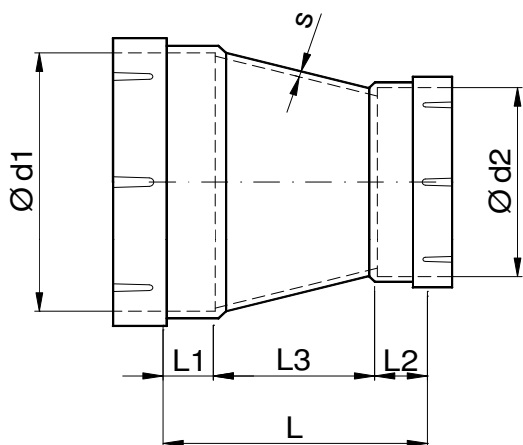

Verloop symmetrisch

sok aansluiting

reducers symmetrical

socket connection

PPs, PP, PE, PPs-el

d1 - d2	L	L1	L2	L3	s	kg						
0063-0050	58	25	35	20	3,0	0,1						
0075-0050	83	35	35	45	3,0	0,1						
0075-0063	63	35	25	35	3,0	0,1						
0090-0050	113	35	35	75	3,0	0,1						
0090-0063	95	35	25	70	3,0	0,1						
0090-0075	120	40	40	40	3,0	0,1						
0110-0050	175	40	35	100	3,0	0,2						
0110-0063	165	40	25	100	3,0	0,2						
0110-0075	170	40	35	95	3,0	0,2						
0110-0090	135	35	35	65	3,0	0,2						
0125-0050	215	40	35	140	3,0	0,3						
0125-0063	205	40	25	140	3,0	0,2						
0125-0075	195	40	35	120	3,0	0,2						
0125-0090	165	40	35	90	3,0	0,2						
0125-0110	120	40	35	45	3,0	0,2						
0160-0050	275	40	35	200	3,0	0,3						
0160-0063	260	40	25	195	3,0	0,3						
0160-0075	250	40	35	175	3,0	0,3						
0160-0090	220	40	35	145	3,0	0,3						
0160-0110	190	40	35	115	3,0	0,3						
0160-0125	145	40	40	65	3,0	0,3						
0200-0050	360	50	35	275	3,0	0,3						
0200-0063	350	50	25	275	3,0	0,3						
0200-0075	340	50	35	255	3,0	0,3						
0200-0090	310	50	35	225	3,0	0,4						
0200-0110	300	50	40	210	3,0	0,4						
0200-0125	245	50	40	155	3,0	0,5						
0200-0160	195	50	50	95	3,0	0,5						