
LED STRIPS



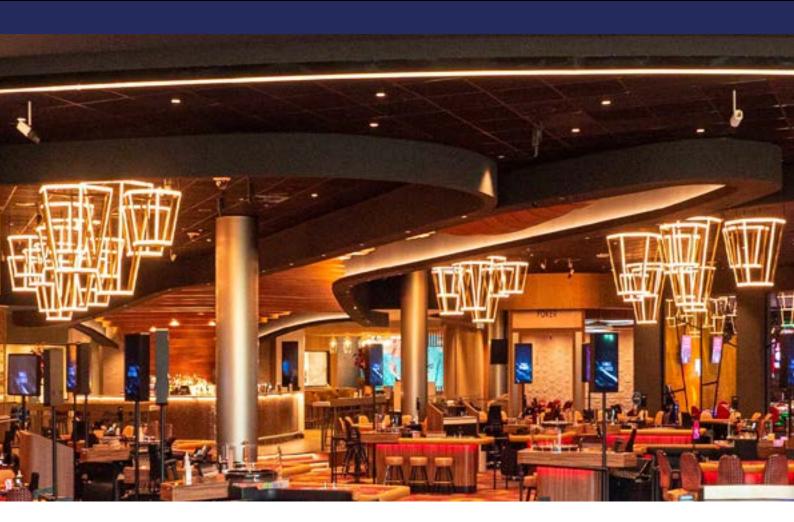

LUCOLED

Experience Lighting

January 2025

Lucoled LED strips

| INTRODUCTION | 03 |
|--------------------------------|----|
| LED Dricm Sictrin | 04 |
| LED Prism S strip | 04 |
| COB strips 4 mm | 05 |
| | |
| COB strips 8 mm ErP compliant | 06 |
| | |
| COB strips 8 mm free cutting | 07 |
| | |
| COB strips 8 mm Tuneable White | 08 |
| COB strips 10 mm high output | 09 |
| cob strips to mininghoutput | |
| COB strips 10 mm IP65 | 10 |
| | |
| COB strips 12 mm RGBW | 11 |



LUCOLED: NOT JUST ANOTHER LED COMPANY

PAY FOR PERFORMANCE

At LucoLED we operate at the simple principle that the customer should only pay for product performance and not for the overhead and excessive margins most major brands add to their cost.

It is LucoLED's mission to provide fit for purpose, reliable and efficient lighting solutions for visual communication and brand identity.

EXPERIENCE

LucoLED is based on over 25 years of experience in the signage industry and has developed an in depth knowledge of the basic needs of the market. Backed by industry leading design and production facilities LucoLED provides high quality products with exceptional performance and warranties.

LucoLED's ODM production uses state of the art equipment and has extensive R&D and testing facilities. Besides a range of standard products LucoLED can also offer tailor made solutions with minimum lead time.

COMPLETE SOLUTION

LucoLED offers a complete system solution for letters, light boxes, flexible and linear accents. Including their own full range power supplies. LucoLED offers an extended system warranty up to the lifetime of the sign as we believe in our products.

GLOBAL REACH

LucoLED products are available globally through a distribution and logistics network covering over 80 countries. With offices in Belgium, The Netherlands and India and seven warehouse locations in various countries we optimise logistics and guarantee a short delivery time for local customers.

REFERENCES

LucoLED products are used by many international brands as Shell, Lidl, Starbucks, ESSO, UNO, PUMA, Pizza Hut, Mc Donald's, BP and many more.

INNOVATION

LucoLED continues to bring innovations to the LED sign industry. Examples are Lucoline, high efficiency optics, intelligent controls for dimming, layout software tools for Lucoline, lightboxes and channel letters.



LED Prism S-Strip

Flexible S-shape LED strip with micro-prism lenses suitable for channel letter applications between 30 and 60 mm deep, inclucing block acrylic. High CRI. Ultra narrow binning, McAdams step 3.

SPECIFICATIONS


- Cuttable every 25 mm
- Packed per 5 m reel.
- 3 Year Warranty

PRODUCT DATA

- Beam angle $> 150^{\circ}$
- UL, CE and RoHS compliant
- 12 V DC
- Operating temperature -25°~+60°C
- IP20



| ltem no | LED colour | CCT (K) | CRI | SDCM | Power (W/m) | Luminous Flux (lm/m) | Effcacy (lm/W) |
|--------------------|------------|---------|-----|------|----------------|----------------------------|-------------------|
| LSSP-W30-5000-IP20 | White | 3000 | >80 | ≤ 3 | 5.5 | 528 | 96 |
| LSSP-W65-5000-IP20 | White | 6500 | >80 | ≤ 3 | 5.5 | 550 | 100 |





COB Strips 4 mm

Narrow, 4 mm wide, Chip On Board (COB) strips for linear lighting without visible spots and side lighting light sheet applications. High CRI. Ultra narrow binning, McAdams step 3.

SPECIFICATIONS


- Cuttable every 33 mm
- Packed per 5 m reel.
- 3 Year Warranty
- 480 Chip On Board LED's per meter
- Beam angle > 140°
- UL, CE and RoHS compliant
- 24 V DC
- Operating temperature -25°~+60°C
- IP20

PRODUCT DATA

| Ż | H | Î.D | 5 | |
|---|----|-----|---|---|
| Ĥ | | | X | À |
| 田 | | | | Ħ |
| | ¥4 | | Ķ | |



| ltem no | LED colour | CCT (K) | CRI | SDCM | Power (W/m) | Luminous Flux (Im/m) | Effcacy (lm/W) |
|--------------|------------|---------|-----|------|----------------|----------------------------|-------------------|
| COB480-4-W27 | White | 2700 | >90 | ≤ 3 | 5.5 | 412 | 75 |
| COB480-4-W40 | White | 4000 | >90 | ≤ 3 | 5.5 | 522 | 95 |
| COB480-4-W65 | White | 6500 | >90 | ≤ 3 | 5.5 | 522 | 95 |

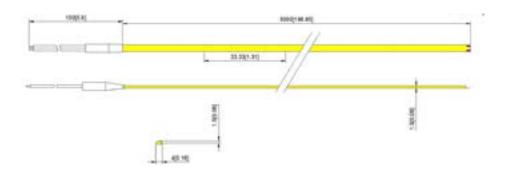




COB Strips 8 mm ErP compliant

8 mm wide, Chip On Board (COB) strips for linear lighting without visible spots. High efficiency, High CRI, ErP compliant. Ultra narrow binning, McAdams step 3.

SPECIFICATIONS


- Cuttable every 31 mm
- Packed per 5 m reel.
- 5 Year Warranty
- 512 Chip On Board LED's per meter
- Beam angle > 135°
- UL, CE and RoHS compliant
- 24 V DC
- Operating temperature -25°~+60°C
- IP20

PRODUCT DATA





| ltem no | LED colour | CCT (K) | CRI | SDCM | Power (W/m) | Luminous Flux (Im/m) | Effcacy (lm/W) |
|--------------|------------|---------|-----|------|----------------|----------------------------|-------------------|
| COB512-8-W27 | White | 2700 | >90 | ≤ 3 | 12 | 1044 | 87 |
| COB512-8-W30 | White | 3000 | >90 | ≤ 3 | 12 | 1116 | 93 |
| COB512-8-W40 | White | 4000 | >90 | ≤ 3 | 12 | 1236 | 103 |
| COB512-8-W65 | White | 6500 | >90 | ≤ 3 | 12 | 1212 | 101 |

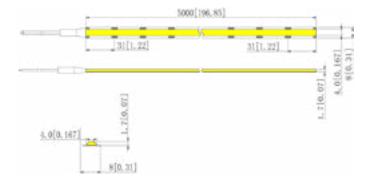




COB Strips 8 mm free cuttable

8 mm wide, Chip On Board (COB) strips for linear lighting without visible spots. Free cuttable for most flexible applications. High CRI. Ultra narrow binning, McAdams step 3.

SPECIFICATIONS


- Free cuttable every 1 mm
- Packed per 10 m reel.
- 3 Year Warranty
- 480 Chip On Board LED's per meter
- Beam angle > 135°
- UL, CE and RoHS compliant
- 24 V DC
- Operating temperature -25°~+60°C
- IP20

PRODUCT DATA





| ltem no | LED colour | CCT (K) | CRI | SDCM | Power (W/m) | Luminous Flux (Im/m) | Effcacy (lm/W) |
|--------------|------------|---------|-----|------|----------------|----------------------------|-------------------|
| COB480-8-W40 | White | 4000 | >90 | ≤ 3 | 10 | 550 | 55 |

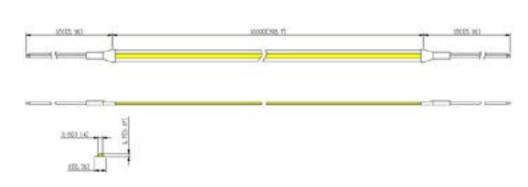



2700K

4000K

5000K




COB Strips 8 mm tuneable white


8 mm wide, Chip On Board (COB) strips for linear lighting without visible spots. Tuneable white from 2700K to 6500K for human centric lighting and best colour matching per application. High CRI. Ultra narrow binning, McAdams step 3.

SPECIFICATIONS


- Cuttable every 50 mm
- Packed per 5 m reel.
- 3 Year Warranty
- 560 Chip On Board LED's per meter
- Beam angle > 135°
- UL, CE and RoHS compliant
- 24 V DC
- Operating temperature -25°~+60°C
- IP20

PRODUCT DATA





| ltem no | LED colour | CCT (K) | CRI | SDCM | Power (W/m) | Luminous Flux (Im/m) | Effcacy (lm/W) |
|-------------|------------|---------------------------------|-----|------|----------------|----------------------------|-------------------|
| | White | 2700 only | >90 | ≤ 3 | 7 | 480 | 69 |
| | White | 6500 only | >90 | ≤ 3 | 7 | 600 | 86 |
| COB560-8-TW | White | 4600 (2700 and 6500 full) | >90 | ≤ 3 | 14 | 1080 | 77 |






COB Strips 10 mm high output ErP

10 mm wide, Chip On Board (COB) strips for linear lighting without visible spots. High output for general lighting applications. High efficacy ErP compliant. Ultra narrow binning, McAdams step 3.

SPECIFICATIONS


- Cuttable every 33 mm
- Packed per 5 m reel.
- 5 Year Warranty
- 720 Chip On Board LED's per meter
- Beam angle > 140°
- UL, CE, ErP and RoHS compliant
- 24 V DC
- Operating temperature -25°~+60°C
- IP20

PRODUCT DATA





| ltem no | LED colour | CCT (K) | CRI | SDCM | Power (W/m) | Luminous Flux (Im/m) | Effcacy (lm/W) |
|---------------|------------|---------|-----|------|----------------|----------------------------|-------------------|
| COB720-10-W40 | White | 4000 | >90 | ≤ 3 | 20 | 2040 | 102 |
| COB720-10-W65 | White | 6500 | >90 | ≤ 3 | 20 | 2000 | 100 |

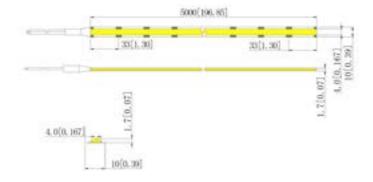



COB Strips 10 mm IP65 waterproof

10 mm wide, Chip On Board (COB) strips for linear lighting without visible spots in damp or wet locations. High CRI. Ultra narrow binning, McAdams step 3.

SPECIFICATIONS

- Cuttable every 50 mm
- Packed per 5 m reel.
- 3 Year Warranty
- 320 Chip On Board LED's per meter
- Beam angle > 135°
- UL, CE and RoHS compliant
- 24 V DC
- Operating temperature -25°~+60°C

• IP65

PRODUCT DATA


| -111 | | 156 |
|------|------|--|
| -10 | | an a |
| * | | Ħ. |
| -uC | | |
| -31 | CURT | 30 - (30/310, 130, 0364 30 - (30/310, 130, 0460 130/310, 100, 0460 |



| ltem no | LED colour | CCT (K) | CRI | SDCM | Power (W/m) | Luminous Flux (lm/m) | Effcacy (lm/W) |
|--------------------|------------|---------|-----|------|----------------|----------------------------|-------------------|
| COB320-10-IP65-W30 | White | 3000 | >90 | ≤ 3 | 10 | 650 | 65 |
| COB320-10-IP65-W40 | White | 4000 | >90 | ≤ 3 | 10 | 710 | 71 |
| COB320-10-IP65-W65 | White | 6500 | >90 | ≤ 3 | 10 | 720 | 72 |

ACCESSOIRES

| ltem no | | Description | Quantity |
|-------------------|-----------------------|-------------|-----------|
| COB320-10-IP65-CS | COB320 strip IP 65 | Cable set | bag of 10 |
| COB320-10-IP65-EC | | End Cap | bag of 10 |
| COB320-10-IP65-FC | | Front Cap | bag of 10 |

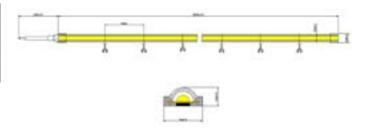



COB Strips 12 mm RGBW

12 mm wide, Chip On Board (COB) strips for linear lighting without visible spots. RGBW for advanced colour settings with true white.


SPECIFICATIONS

- Cuttable every 71.4 mm
- Packed per 5 m reel.
- 3 Year Warranty
- 784 Chip On Board LED's per meter
- Beam angle > 140°
- UL, CE and RoHS compliant
- 24 V DC
- Operating temperature -25°~+60°C
- IP20

PRODUCT DATA



| ltem no | LED colour | WL (nm) CCT (K) | CRI | SDCM | Power (W/m) | Luminous Flux (Im/m) | Effcacy (lm/W) |
|------------------|------------|--------------------|-----|------|----------------|----------------------------|-------------------|
| | red | 620-630 | | | 4 | 136 | 34 |
| | green | 520-525 | | | 4 | 364 | 91 |
| COB784-12-RGBW40 | blue | 455-560 | | | 4 | 84 | 21 |
| | white | 4000 | >90 | ≤ 3 | 4 | 356 | 89 |
| | RGBW full | | | | 16 | 940 | 59 |

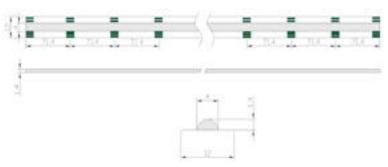







Experience Lighting

BELGIUM

Industriepark 32b 3290 Diest Belgium

www.lucoled.com

D: +32 (0) 13292829
⊠: info@lucoled.com

THE NETHERLANDS

Rotterdamseweg 388F 2629 HG Delft The Netherlands

www.lucoled.com

D: +31 (0) 153649186
⊠:info@lucoled.com

LUCOLED INDIA PVT LTD.

2088 Vijayanagar Colony Sadashiv Peth Pune 411030 India

www.lucoled.in

D: +91 9850331984
⊠: tejasa@lucoled.in