


## Fittings with short Spigot

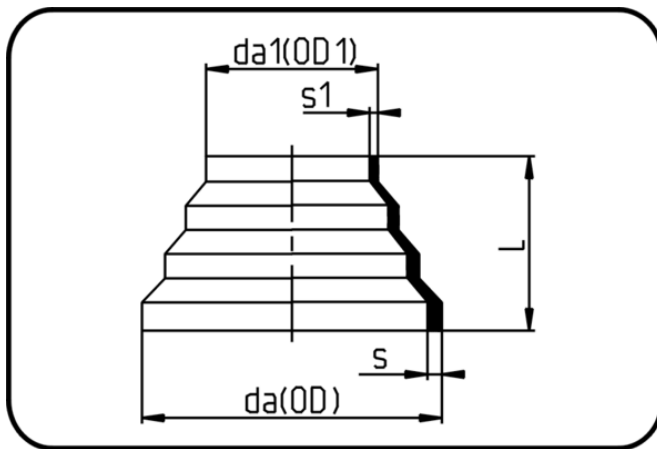

Code: 007

- **Reducer concentric**
- short spigot
- flame retardant & el-conduct.
- injection moulded
- **Butt-welding**
- **PPs-el black**

Dimension	Code	Detail	da(OD) mm	da1(OD1) mm	s mm	L mm	s1 mm	Weight
160/110	19.007.1611.33	160/110 SDR33 MOP<1,5bar	160	110	4,9	83	3,4	0.21
225/160	19.007.2216.33	225/160 SDR33 MOP<1,5bar	225	160	6,9	90	4,9	0.512
315/225	19.007.3122.33	315/225 SDR33 MOP<1,5bar	315	225	9,7	134	6,9	1.32
160/110	19.007.1611.17	160/110 SDR17 MOP<3,5bar	160	110	9,5	83	6,6	0.358
225/160	19.007.2216.17	225/160 SDR17 MOP<3,5bar	225	160	13,4	90	9,5	0.834
63/16	19.007.6316.11	63/16 SDR11 MOP<6bar	63	16	5,8	97	1,8	0.054
75/32	19.007.7532.11	75/32 SDR11 MOP<6bar	75	32	6,8	71	2,9	0.079
110/63	19.007.1163.11	110/63 SDR11 MOP<6bar	110	63	10	62	5,8	0.187