


## Fittings for Socket Welding

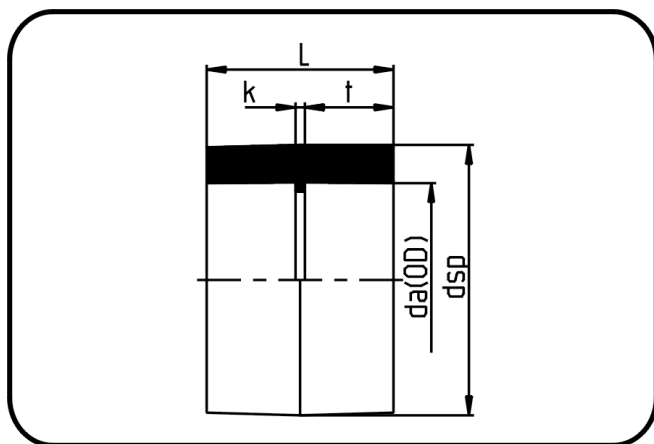

Code: 053

- **Socket**
- injection moulded
- **Socket-welding**
- **PVDF natural**

| Dimension | Code           | Detail           | da(OD)<br>mm | L<br>mm | dsp<br>mm | t<br>mm | k<br>mm | p<br>bar | Weight |
|-----------|----------------|------------------|--------------|---------|-----------|---------|---------|----------|--------|
| 20        | 30.053.0020.07 | 20 - MOP 20 bar  | 20           | 35      | 29        | 15,8    | 3       | 20       | 0.02   |
| 25        | 30.053.0025.07 | 25 - MOP 20 bar  | 25           | 39      | 35        | 17,5    | 4       | 20       | 0.03   |
| 32        | 30.053.0032.07 | 32 - MOP 20 bar  | 32           | 43      | 43        | 20      | 4       | 20       | 0.05   |
| 40        | 30.053.0040.07 | 40 - MOP 20 bar  | 40           | 47      | 52        | 21      | 5       | 20       | 0.07   |
| 50        | 30.053.0050.07 | 50 - MOP 20 bar  | 50           | 53      | 64        | 24      | 5       | 20       | 0.13   |
| 63        | 30.053.0063.07 | 63 - MOP 20 bar  | 63           | 60      | 81        | 28      | 4       | 20       | 0.23   |
| 75        | 30.053.0075.07 | 75 - MOP 20 bar  | 75           | 70      | 92        | 32,5    | 5       | 20       | 0.29   |
| 90        | 30.053.0090.07 | 90 - MOP 20 bar  | 90           | 78      | 114,5     | 36,5    | 5       | 20       | 0.57   |
| 110       | 30.053.0110.07 | 110 - MOP 20 bar | 110          | 90      | 133       | 42,5    | 5       | 20       | 0.74   |